




**L.T.F.**

# Low Voltage Electronic Power Supply

**75W 12V AC**

**TA75WA12 Series & TU75WA12 Series**

No Load Technology, Optimized for Low Voltage LED & Halogen Bulbs! \*\*

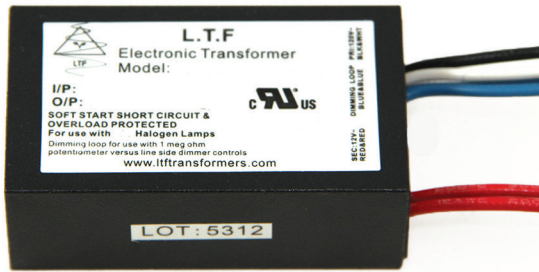

Efficiency	higher than 85%
Power Factor	>98%
Case TC*	90°C Max
Protection	Input/ Output
Storage	-30°C/ +90°C
Humidity	95% RH max
IP Rating	IP 60
Standard Dimming	ELV Dimmable
Special Dimming	Dimming Loop (DL)
Class	Class 2



**RoHS**



## FEATURES

- No load technology, works with both Halogen & LED AC loads \*\*
- Isolated output power per NEC and UL safety requirements
- UL recognized Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable and available with special dimming features
- Low profile, small compact design to fit in most enclosures

## ELECTRICAL SPECIFICATIONS

120V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TA75WA12	120V AC /60Hz	0.63 A	12V AC	100g	Incandescent & Halogen Bulbs
TA75WA12LED	120V AC /60Hz	0.63 A	12V AC	100g	AC LED Bulbs, Incandescent & Halogen Bulbs
TA75WA12DL	120V AC /60Hz	0.63 A	12V AC	170g	Incandescent & Halogen Bulbs
TA75WA12LEDDL	120V AC /60Hz	0.63 A	12V AC	170g	AC LED Bulbs, Incandescent & Halogen Bulbs

220-240V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TU75WA12	220-240V AC /60Hz	0.34 A	12V AC	100g	Incandescent & Halogen Bulbs
TU75WA12LED	220-240V AC /60Hz	0.34 A	12V AC	100g	AC LED Bulbs, Incandescent & Halogen Bulbs
TU75WA12DL	220-240V AC /60Hz	0.34 A	12V AC	100g	Incandescent & Halogen Bulbs
TU75WA12LEDDL	220-240V AC /60Hz	0.34 A	12V AC	100g	AC LED Bulbs, Incandescent & Halogen Bulbs

\*Under confirmed thermal condition \*\*Only true for model #'s with "LED" suffix

L.T.F., L.L.C. PHONE: (847) 498 5832 FAX: (773) 337 5628 EMAIL: sales@lfttechnology.com  
 Company's Address: 2905 MacArthur Blvd Northbrook, IL 60062 U.S.A. [www.lfttechnology.com](http://www.lfttechnology.com)


© L.T.F., L.L.C. All rights reserved. L.T.F. Reserves the right to change specifications for product improvements without notification.




MECHANICAL SPECS.

Available Form Factors	Dimensions
Standard "B4"	67.5X33X21mm
"B2"	56.5X33X21mm
"G2"	233.1x85.5x48.9mm

B4 - STANDARD

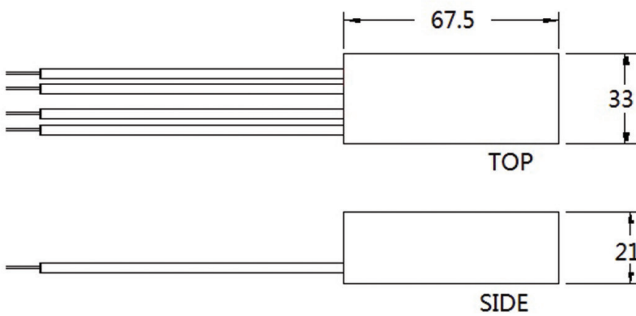

B2 - SPECIAL ORDER

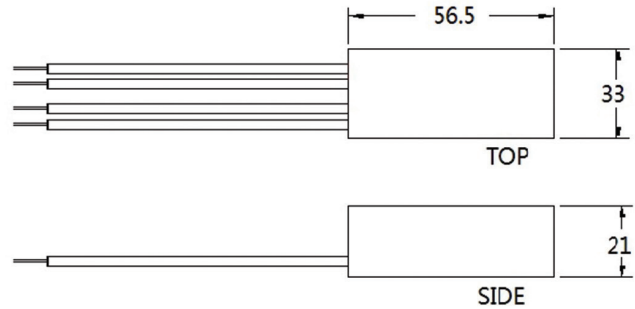

G2 - LED REMOTE (RE) MODELS ONLY

