


DL113W350C1537A11TOD-0000

One Capacitive Touch Dimming Driver



Input Voltage	7-12V DC
Output	10-350mA Constant Current
Load	15-37V DC LED
Class	Class 2
Dimming	One Capacitive Touch Pad Dimmable

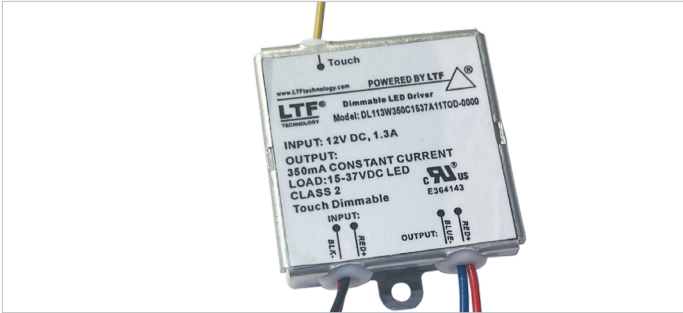

This one capacitive touch dimming driver is easily built into a desktop lighting fixture to realize the touch dimmable fixture with a capacitive touch pad. It can be turned on or off by short touching adjusted the light output by long touching. The output current is dimmed between 10mA and 350mA.

Model Number	Input Voltage	Output	Load	Dimming
DL113W350C1537A11TOD-0000	7-12V DC	10-350mA	6-12PCS LEDs	One Capacitive Touch Pad Dimming

FEATURES

- Thin, Compact design
- Easy Integration
- Flicker-free design

APPLICATIONS

- Desktop lighting fixtures
- Bedroom lighting fixtures
- Portable lighting fixtures

MODEL SPECIFICATIONS

MODEL	DIMENSIONS
DL113W350C1537A11TOD-0000	1.5"(39.3mm) x 1.5"(38.9mm) x 0.5"(12.9mm)

