




L.T.F

AC Line Voltage LED Board

Dimmable Square 195x195mm
QLUXDOBAS19520W112LED Series

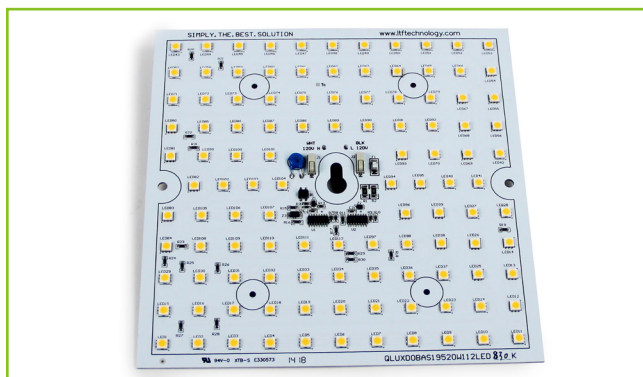

General Information	
Wattage	20W
CRI	80, 90+
CCT	2400-5000K
Custom CCT	Available
Dimensions	195x195mm
Dimming	ELV / Phase
Beam Angle	160

RoHS



5
Year Warranty

FEATURES

- High Color Renedering Index (CRI) Ra max. 98
- High efficacy lumen output
- LM-80 compliant LEDs
- Tight Binning 3 Step Mac Adam Ellipses
- Uniform & Crisp Light Source Intensity
- Hot Spot Free Design
- Exceed ENERGY STAR lumen maintenance requirements
- Extra thin low profile
- Low heat generation, easy thermal management
- Easy to fit in new design or retrofit applications
- Meets California Title 24 requirements
- Flicker free dimming with ELV dimmers
- 0-10V dimming option

APPLICATIONS

For Architectural New Designs and Retrofits lighting fixtures:

- | | |
|----------------------|--------------------|
| Indoor Lightings: | Outdoor Lightings: |
| • Recessed can light | • Street light |
| • Ceiling light | • Marker lights |
| • Wall sconces | • Wall sconces |
| • Table lamps | • Signage lights |
| • Fixtures | |
| • Signage | |

ELECTRICAL SPECS.

Order Number	CRI	CCT	Order Number	CRI	CCT
QLUXDOBAS19520W112LED22K8CR	80+	2200K	QLUXDOBAS19520W112LED22K9CR	90+	2200K
QLUXDOBAS19520W112LED25K8CR	80+	2500K	QLUXDOBAS19520W112LED25K9CR	90+	2500K
QLUXDOBAS19520W112LED27K8CR	80+	2700K	QLUXDOBAS19520W112LED27K9CR	90+	2700K
QLUXDOBAS19520W112LED30K8CR	80+	3000K	QLUXDOBAS19520W112LED30K9CR	90+	3000K
QLUXDOBAS19520W112LED32K8CR	80+	3200K	QLUXDOBAS19520W112LED32K9CR	90+	3200K
QLUXDOBAS19520W112LED35K8CR	80+	3500K	QLUXDOBAS19520W112LED35K9CR	90+	3500K
QLUXDOBAS19520W112LED40K8CR	80+	4000K	QLUXDOBAS19520W112LED40K9CR	90+	4000K
QLUXDOBAS19520W112LED50K8CR	80+	5000K	QLUXDOBAS19520W112LED50K9CR	90+	5000K

AC Line Voltage LED Boards - QLUXDOBAS19520W112LED



CIE Colorimetric Parameters*							
Chromaticity Coordinates		x=0.4338 y=0.3954					
CCT		2982K					
Peak Wavelength		602.6nm					
Dominant Wavelength		584.1nm					
Rendering Index		81.7					
Color Ratio		R=22.9%, G=75.3%, B=1.7%					
Half Bandwidth		128.5nm					
Color Purity		48.9%					
R1=80	R2=91	R3=96	R4=78	R5=80	R6=88	R7=82	R8=60
R9=11	R10=79	R11=75	R12=72	R13=82	R14=98	R15=75	


* Test result shown based on 3000 CCT, 80 CRI model


Photometric Parameters*	
Luminous Flux:	1790.03lm
Radiant Power:	5219mW
Efficacy:	78.51lm/W

* Test result shown based on 3000 CCT, 80 CRI model

Electric Parameters	
Voltage	U=120.4V
Current	I=0.19A
Power	P=22.8W
Power Factor	PF=0.994

MECHANICAL SPECS.

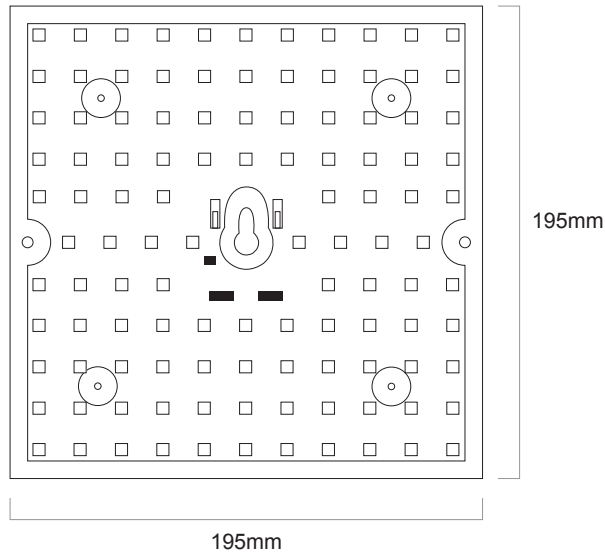

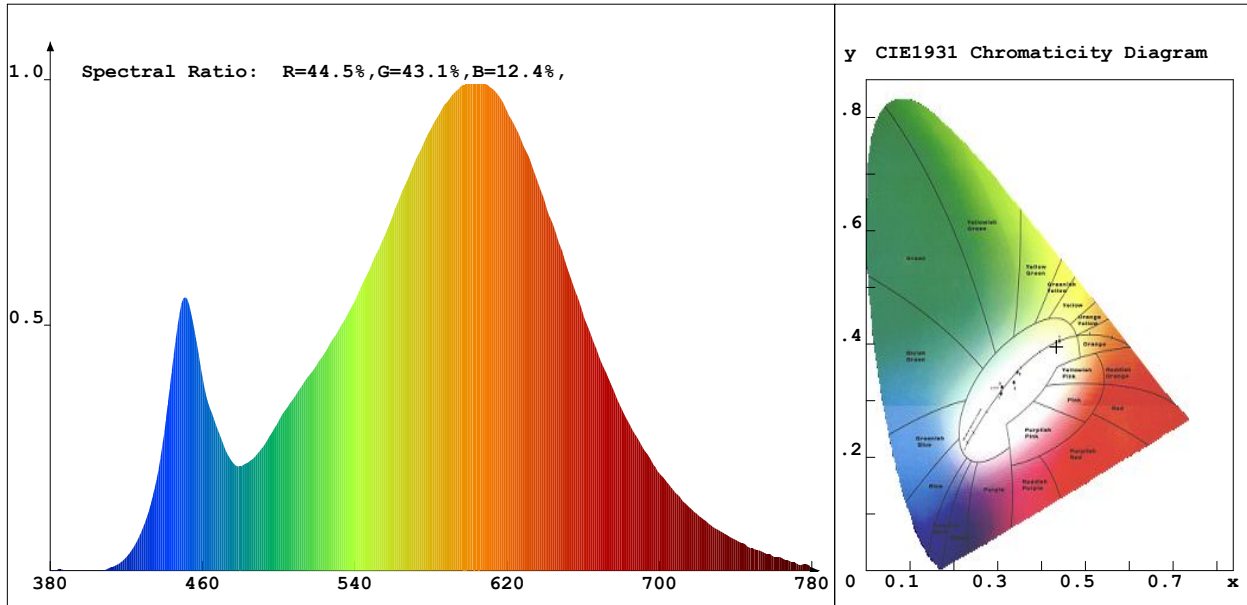

Diagrams shown are based on the test report for 80 CRI 3000K model.

Precaution for use:

(1) Storage

To avoid the moisture penetration, we recommend store in a dry box with a desiccant . The recommended storage temperature range is 5C to 50C and a maximum humidity of RH50%.

(2) Use Precaution after Opening the Packaging as separation of the lens may affect the light output efficiency.

Pay attention to the following:

a. Recommend conditions after opening the package

- Sealing

- Temperature : 5 ~ 40° Humidity : less than RH30%

(3) Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering.

(4) Radioactive exposure is not considered for the products listed here in.

(5) Gallium arsenide is used in some of the products listed in this publication. These products are dangerous if they are burned or shredded in the process of disposal. It is also dangerous to drink the liquid or inhale the gas generated by such products when chemically disposed of.

(6) This device should not be used in any type of fluid such as water, oil, organic solvent and etc. When washing is required, IPA (Isopropyl Alcohol) should be used.

(7) When the LEDs are in operation the maximum current should be decided after measuring the package temperature.

(8) LEDs must be stored properly to maintain the device. If the LEDs are stored for 3 months or more after being shipped from SSC, a sealed container with a nitrogen atmosphere should be used for storage.

(9) The appearance and specifications of the product may be modified for improvement without notice.

(10) Long time exposure of sunlight or occasional UV exposure will cause lens discoloration.

(11) VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LEDs and discolor when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture.

Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues.

CAUTION!

- Turn the power off before installing LED to the proper constant current LED driver.
- Avoid short circuit, or drilling / cutting the LED board! It will damage its electrical circuit!