




L.T.F. Low Voltage Electronic Power Supply



105W 24V AC/DC
TA105WA24, TU105A24 Series &
TA105WD24, TU105D24 Series

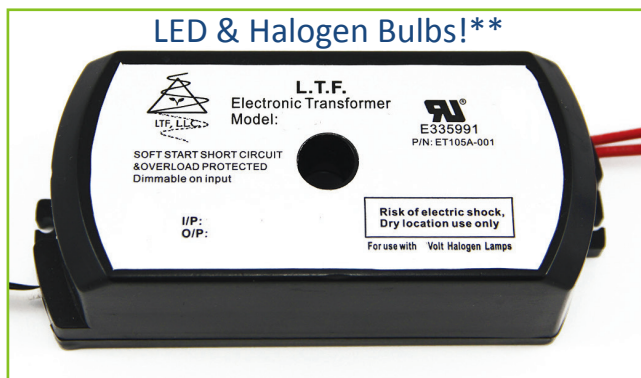

Efficiency	higher than 85%
Power Factor	>98%
Case TC*	90C° Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 60
Dimming	ELV Dimmable



RoHS



FEATURES

- No load technology, works with both Halogen & LED AC loads **
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable
- Low profile, small compact design to fit in most enclosures

ELECTRICAL SPECIFICATIONS

120V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TA105WA24	120V AC /60Hz	0.88 A	24V AC	240g	Incandescent & Halogen Bulbs
TA105WA24LED	120V AC /60Hz	0.88 A	24V AC	240g	AC LED Bulbs, Incandescent & Halogen Bulbs
TA105WD24LED	120V AC /60Hz	0.88 A	24V DC	240g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

120V Remote					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TA105WD24LEDRE	120V AC /60Hz	0.88 A	24V DC	713g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs
TA105WD24LEDREO	120V AC /60Hz	0.88 A	24V DC	1037g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

220-240V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TU105WA24	220-240V AC 50/60Hz	0.48 A	24V AC	240g	Incandescent & Halogen Bulbs
TU105WA24LED	220-240V AC 50/60Hz	0.48 A	24V AC	240g	AC LED Bulbs, Incandescent & Halogen Bulbs
TU105WD24LED	220-240V AC 50/60Hz	0.48 A	24V DC	240g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

* Under confirmed thermal condition




220-240V Remote					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TU105WD24LEDRE	220-240V AC 50/60Hz	0.48 A	24V DC	713g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs
TU105WD24LEDREO	220-240V AC 50/60Hz	0.48 A	24V DC	1037g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

MECHANICAL SPECS.


Available Form Factors	Dimensions
Standard AC "E5"	110x47x35mm
Standard DC "E6"	120x55.5x38mm
"B5"	77x32x21mm
"E"	107x44.5x24.5mm
"G2"	233.1x85.5x48.9mm
"G3"	280x103x56mm

STANDARD


AC - E5 110X47X35MM
DC - E6 120X55.5X38MM

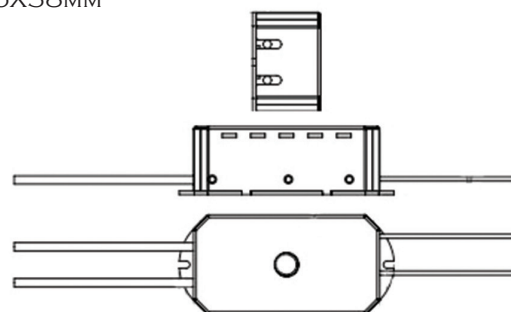


E - SPECIAL ORDER

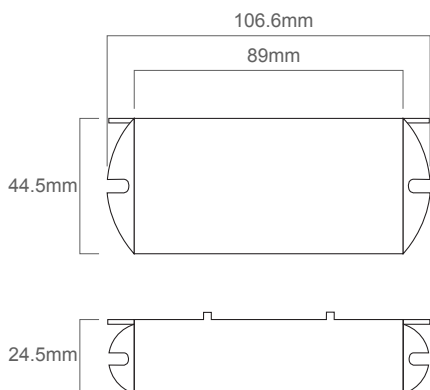

B5 - SPECIAL ORDER - AC MODELS ONLY

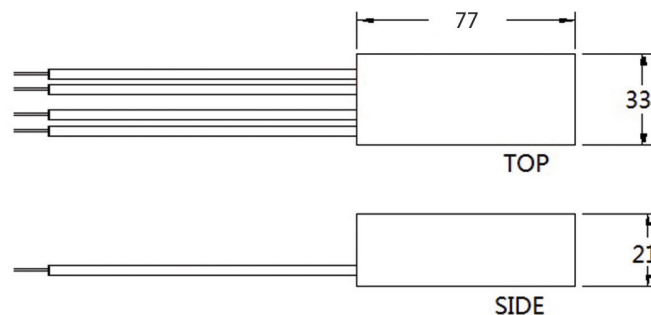

G2 - LED REMOTE (RE) MODELS ONLY

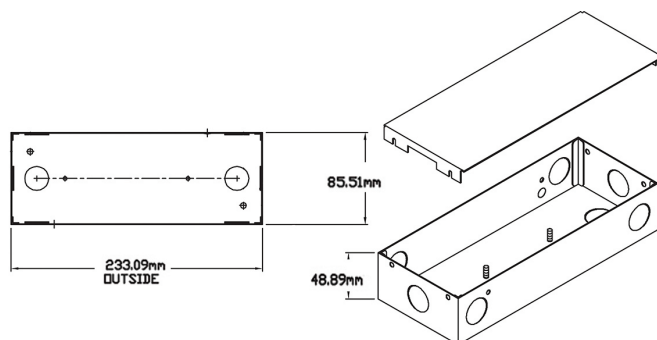

G3 - LED REMOTE (REO) MODELS ONLY

