



# L.T.F. Low Voltage Electronic Power Supply

15W 24V AC

TA15WA24 and TU15WA24 Series



Efficiency	higher than 85%
Power Factor	>98%
Case TC*	90C° Max
Protection	Input/ Output
Storage	-30°C/ +90C°
Humidity	95% RH max
IP Rating	IP 60
Dimming	ELV Dimmable
Class	Class 2



RoHS



Year Warranty

## FEATURES

- No load technology, works with both Halogen & LED AC loads \*\*
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable
- Low profile, small compact design to fit in most enclosures

## ELECTRICAL SPECIFICATIONS

120V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TA15WA24	120V AC 50/60Hz	0.13 A	24V AC	80g	Incandescent & Halogen Bulbs
TA15WA24LED	120V AC 50/60Hz	0.13 A	24V AC	80g	AC LED Bulbs, Incandescent & Halogen Bulbs

120V Remote					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TA15WA24RE	120V AC 50/60Hz	0.13 A	24V AC	401.5g	Incandescent & Halogen Bulbs
TA15WA24REO	120V AC 50/60Hz	0.13 A	24V AC	524g	Incandescent & Halogen Bulbs
TA15WA24LEDRE	120V AC 50/60Hz	0.13 A	24V AC	401.5g	AC LED Bulbs, Incandescent & Halogen Bulbs
TA15WA24LEDREO	120V AC 50/60Hz	0.13 A	24V AC	524g	AC LED Bulbs, Incandescent & Halogen Bulbs

120V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TE15WA24LED	277V AC 50/60Hz	0.5 A	24V AC	80g	AC LED Bulbs, Incandescent & Halogen Bulbs

\* Under confirmed thermal condition



120V Remote					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TE15WA24LEDRE	277V AC 50/60Hz	0.05 A	24V AC	401.5g	AC LED Bulbs, Incandescent & Halogen Bulbs
TE15WA24LEDREO	277V AC 50/60Hz	0.05 A	24V AC	524g	AC LED Bulbs, Incandescent & Halogen Bulbs


220-240V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TU15WA24	220-240V AC 50/60Hz	0.07 A	24V AC	80g	Incandescent & Halogen Bulbs
TU15WA24LED	220-240V AC 50/60Hz	0.07 A	24V AC	80g	AC LED Bulbs, Incandescent & Halogen Bulbs

220-240V Remote					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TU15WA24RE	220-240V AC 50/60Hz	0.07 A	24V AC	401.5g	Incandescent & Halogen Bulbs
TU15WA24REO	220-240V AC 50/60Hz	0.07 A	24V AC	524g	Incandescent & Halogen Bulbs
TU15WA24LEDRE	220-240V AC 50/60Hz	0.07 A	24V AC	401.5g	Incandescent & Halogen Bulbs
TU15WA24LEDREO	220-240V AC 50/60Hz	0.07 A	24V AC	524g	Incandescent & Halogen Bulbs


MECHANICAL SPECS.

Available Form Factors	Dimensions
Standard "B2"	56.5X33X21mm
"G1"	207X50.8X43.1mm
"G4"	238X66X48mm

B2 - STANDARD

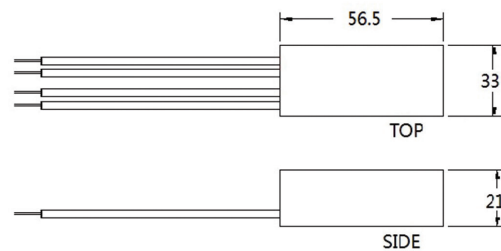

G1 - REMOTE(RE) MODELS ONLY

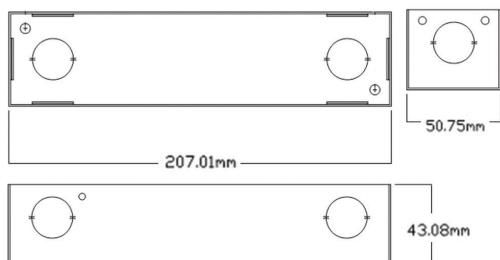

G4 - REMOTE (REO) MODELS ONLY

