



L.T.F.

Quick Driver - CLASS 2

3W - 8W Low Voltage Dimmable LED Driver QDHS Series



Efficiency	> 85%
Power Factor	>95%
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
Class	Class 2 Power Supply
Dimming	ELV, Magnetic LV



RoHS



FEATURES

- Externely small low voltage LED driver with quick connector
- High performance fully dimmable
- Excellent choice for low voltage LED fixtures
- ETL recognized / listed*, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload protection
- Rated for 12-24V magnetic and electronic transformers
- Dimmable with ELV , and magnetic LV type dimmers
- Smooth, flicker free dimming
- Class 2 power supply
- Efficient, high power factor

ELECTRICAL SPECIFICATIONS

4-8 Watt Models					
Part Number	Input Voltage	Input Current	Wattage	Output Voltage	Output Current
QDHS-DL14W100C	12V AC 50/60 Hz	0.33A	4W	30-40V DC	100mA
QDHS-DL15W120C		0.42A	5W	30-38V DC	120mA
QDHS-DL16W150C		0.5A	6W	30-38V DC	150mA
QDHS-DL16W160C		0.5A	6W	30-38V DC	160mA
QDHS-DL17W180C		0.58A	7W	30-38V DC	180mA
QDHS-DL17W200C		0.58A	7W	30-36V DC	200mA
QDHS-DL18W220C		0.66A	8W	30-36V DC	220mA

3-5 Watt Models					
Part Number	Input Voltage	Input Current	Wattage	Output Voltage	Output Current
QDHS-DL13W280C	12V AC 50/60 Hz	0.25A	3W	8-10V DC	280mA
QDHS-DL13W300C		0.25A	3W	8-10V DC	300mA
QDHS-DL13W320C		0.25A	3W	8-10V DC	320mA
QDHS-DL13W350C		0.25A	3W	8-10V DC	350mA
QDHS-DL15W400C		0.42A	5W	8-10V DC	400mA
QDHS-DL15W450C		0.42A	5W	8-10V DC	450mA
QDHS-DL15W480C		0.42A	5W	8-10V DC	480mA
QDHS-DL15W500C		0.42A	5W	8-10V DC	500mA

Dimmable Quick Drive LED Driver - CLASS 2




L.T.F.

Quick Driver - CLASS 2

**3W - 8W Low Voltage
Dimmable LED Driver QDHS Series**




MECHANICAL SPECS

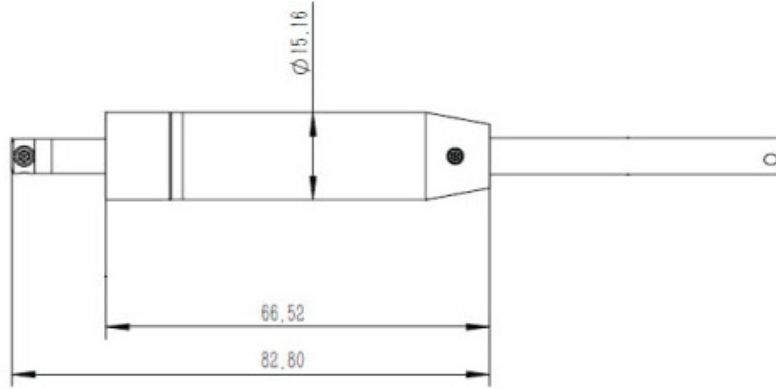

APPLICATIONS

PENDANT

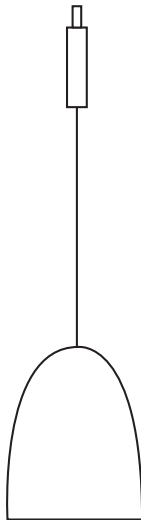

LOW VOLTAGE HEAD

