



L.T.F.

DOBi AC Line Voltage LED Boards



DOBi



Dimmable 15W Round 100mm (OD) QLUXDOBAR10015W42LED DOBi Series

Wattage	15W
Input	120V AC 50/60 Hz
CRI	90+
CCT Options	2700K - 5000K
Custom CCT	Available
Size	100mm (OD)
Dimming	ELV, Triac
Optional Dimming	0-10V
Beam Angle	160°



RoHS



FEATURES

- Exceeds California Title 24 requirements
- AC line voltage driver on board module; No external drivers or transformers required
- High efficacy lumen output: > 110 lm/W
- Smooth dimming with ELV & Triac dimmers
- Dimming range <1% - 100%
- Optional 0-10V dimming
- 220-240V, 277V AC input with optional voltage converter
- LM-80 compliant LEDs

- High Color Renedering Index (CRI) Ra max. 98
- Tight binning 3 Step Mac Adam Ellipses
- Low heat generation, easy thermal management

APPLICATIONS

- New or retrofit OEM fixtures
- Indoor or outdoor applications
- Architectural and commercial
- Flush mount and recessed fixtures

AVAILABLE CONFIGURATIONS

Model	Suffix	CRI	CCT	Lumens
QLUXDOBAR10015W42LED	- 927	90+	2700K	1290lm
QLUXDOBAR10015W42LED	- 930		3000K	1350lm
QLUXDOBAR10015W42LED	- 940		4000K	1530lm
QLUXDOBAR10015W42LED	- 950		5000K	1620lm

Custom CCT available

[1] Luminous flux and efficacy are typical value, measured by an integrated phere at 25°C, tolerance: ± 10%;

[2] Ra/CRI is measured with tolerance: ± 2;

[3] Tolerance of power: ± 1W.




L.T.F.


DOBi AC Line Voltage LED Boards

**Dimmable 15W Round 100mm (OD)
QLUXDOBAR10015W42LED DOBi Series**

SPECTRORADIOMETRIC CHARACTERISTICS

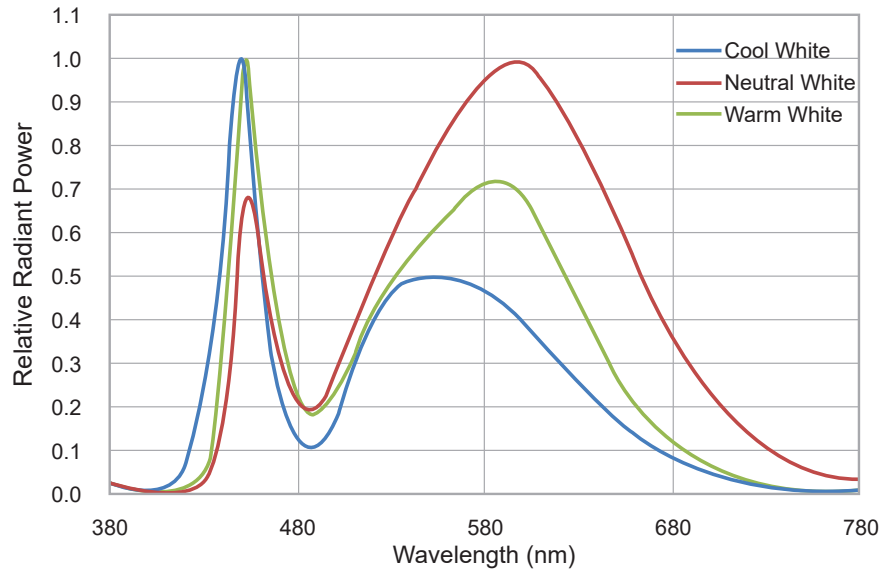

CRI TEST RESULTS

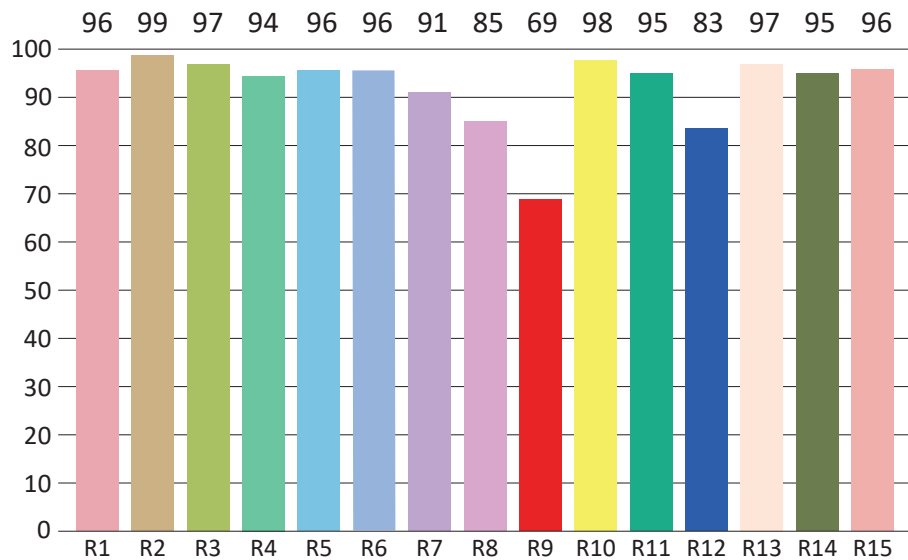

R1 = 96	R2 = 99	R3 = 97	R4 = 94	R5 = 96	R6 = 96	R7 = 91	R8 = 85
R9 = 69	R10 = 98	R11 = 95	R12 = 83	R13 = 97	R14 = 95	R15 = 96	

* Test results based on 3000K model



L.T.F.

DOBi AC Line Voltage LED Boards

**Dimmable 15W Round 100mm (OD)
QLUXDOBAR10015W42LED DOBi Series**

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Parameter	Symbol	Value	Unit
Voltage	V in	132	Vac
LED Solder Temperature	Ts	-20~85	°C
Storage Temperature	Tstg	-40~+100	°C
ESD Sensitivity (HBM)	---	±4000	V
Surge	---	1000	Vac

MECHANICAL SPECIFICATIONS

