


60W AC / DC

TA60WA12 Series, TE60WA12 Series &
TA60WD12 Series, TE60WD12 Series



Efficiency	> 85%
Power Factor	> 98%
Case TC	90C° Max.
Protection	Input / Output
Storage	-30C° / +90C°
Humidity	95% RH Max.
IP Rating	IP 60
Class	Class 2
Dimming	ELV Dimmable

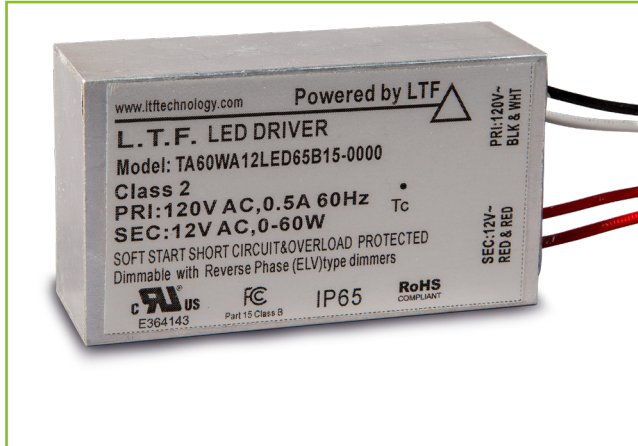

FEATURES

- No load technology, works with both Halogen & LED AC loads**
- Isolated output power per NEC and UL safety requirements
- UL recognized / listed Class 2 power supply, meets UL2108 requirements
- FCC Part 15 Class B rated
- Auto-reset; short circuit, overload and thermal protection
- Soft Start
- Dimmable with ELV type dimmers
- Low profile, small compact design to fit in most enclosures

ELECTRICAL SPECIFICATIONS

120V						
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type	Form Factor
TA60WA12LED65B15	120V AC 50/60Hz	0.5A	12V AC	137.5g	AC LED Bulbs, Incandescent & Halogen Bulbs	B7,C
TA60WD12LEDB15	120V AC 50/60Hz	0.5A	12V DC	137.5g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	E
TA60WA12LEDB15D010	120V AC 50/60Hz	0.5A	12V AC	137.5g	AC LED Bulbs, Incandescent & Halogen bulbs	MB2
TA60WD12LEDB15D010	120V AC 50/60Hz	0.5A	12V DC	137.5g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	E

* Ask for more information

120V Remote						
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type	Form Factor
TA60WA12LED65B15RE	120V AC 50/60Hz	0.5A	12V AC	459g	AC LED Bulbs, Incandescent & Halogen Bulbs	G1
TA60WA12LED65B15REO	120V AC 50/60Hz	0.5A	12V AC	600g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G4
TA60WD12LEDB15RE	120V AC 50/60Hz	0.5A	12V DC	459g	AC LED Bulbs, Incandescent & Halogen bulbs	G1
TA60WD12LEDB15REO	120V AC 50/60Hz	0.5A	12V DC	600g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G4
TA60WA12LED65B15D010RE	120V AC 50/60Hz	0.5A	12V AC	459g	AC LED Bulbs, Incandescent & Halogen Bulbs	G1

120V Remote						
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type	Form Factor
TA60WA12LED65B15D010REO	120V AC 50/60Hz	0.5A	12V AC	600g	AC LED Bulbs, Incandescent & Halogen Bulbs	G4
TA60WD12LEDB15D010RE	120V AC 50/60Hz	0.5A	12V DC	459g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G1
TA60WD12LEDB15D010REO	120V AC 50/60Hz	0.5A	12V DC	600g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G4


277V						
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type	Form Factor
TE60WA12LED65B15	277V AC 50/60Hz	0.2A	12V AC	137.5g	AC LED Bulbs, Incandescent & Halogen Bulbs	B7,C
TE60WD12LEDB15	277V AC 50/60Hz	0.2A	12V DC	137.5g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	E
TE60WA12LED65B15D010	277V AC 50/60Hz	0.2A	12V AC	137.5g	AC LED Bulbs, Incandescent & Halogen bulbs	MB2
TE60WD12LEDB15D010	277V AC 50/60Hz	0.2A	12V DC	137.5g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	E

277V Remote						
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type	Form Factor
TE60WA12LED65B15RE	277V AC 50/60Hz	0.2A	12V AC	459g	AC LED Bulbs, Incandescent & Halogen Bulbs	G1
TE60WA12LED65B15REO	277V AC 50/60Hz	0.2A	12V AC	600g	AC LED Bulbs, Incandescent & Halogen Bulbs	G4
TE60WD12LEDB15RE	277V AC 50/60Hz	0.2A	12V DC	459g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G1
TE60WD12LEDB15REO	277V AC 50/60Hz	0.2A	12V DC	600g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G4
TE60WA12LED65B15D010RE	277V AC 50/60Hz	0.2A	12V AC	459g	AC LED Bulbs, Incandescent & Halogen Bulbs	G1
TE60WA12LED65B15D010REO	277V AC 50/60Hz	0.2A	12V AC	600g	AC LED Bulbs, Incandescent & Halogen Bulbs	G4
TE60WD12LEDB15D010RE	277V AC 50/60Hz	0.2A	12V DC	459g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G1
TE60WD12LEDB15D010REO	277V AC 50/60Hz	0.2A	12V DC	600g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	G4


MECHANICAL SPECS

Available Form Factors	Dimensions
"B7"	70.5x40x22.5mm
"C"	77.4x25x38mm
"G1"	207x50.8x43.1mm
"G4"	238x66x48
"MB2"	80x40x22mm
"E"	110x45x24mm


C

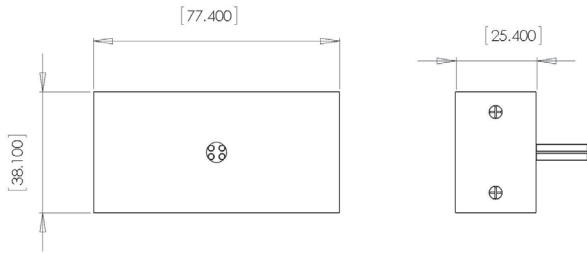


B7

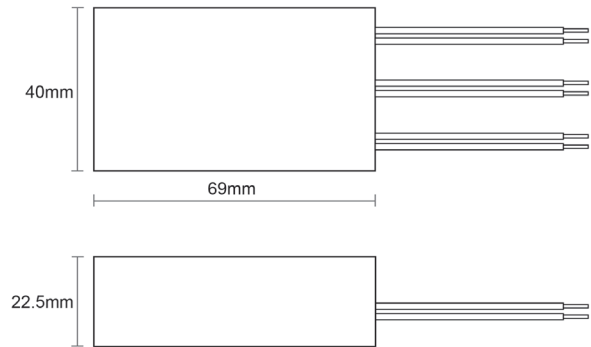

MB2

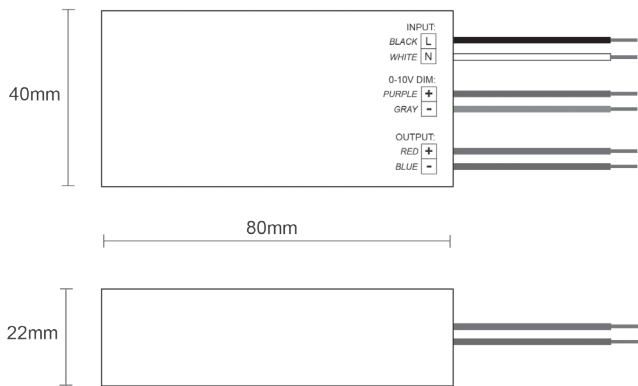

E

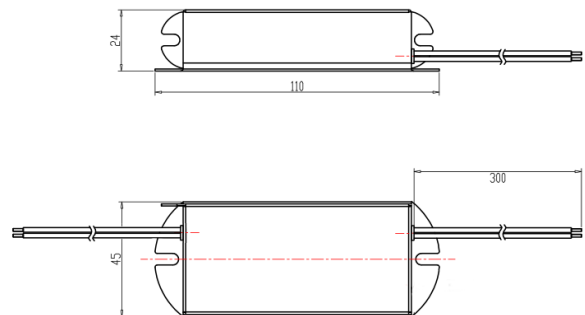


REMOTE ENCLOSURES - UL LISTED

Enclosure Type	Enclosure Dimensions
G1 Remote Indoor (Damp Rated)	207 x 51 x 43mm
G4 Remote Outdoor (Wet Rated)	238 (202) x 66 x 48mm



G1 - REMOTE (RE)

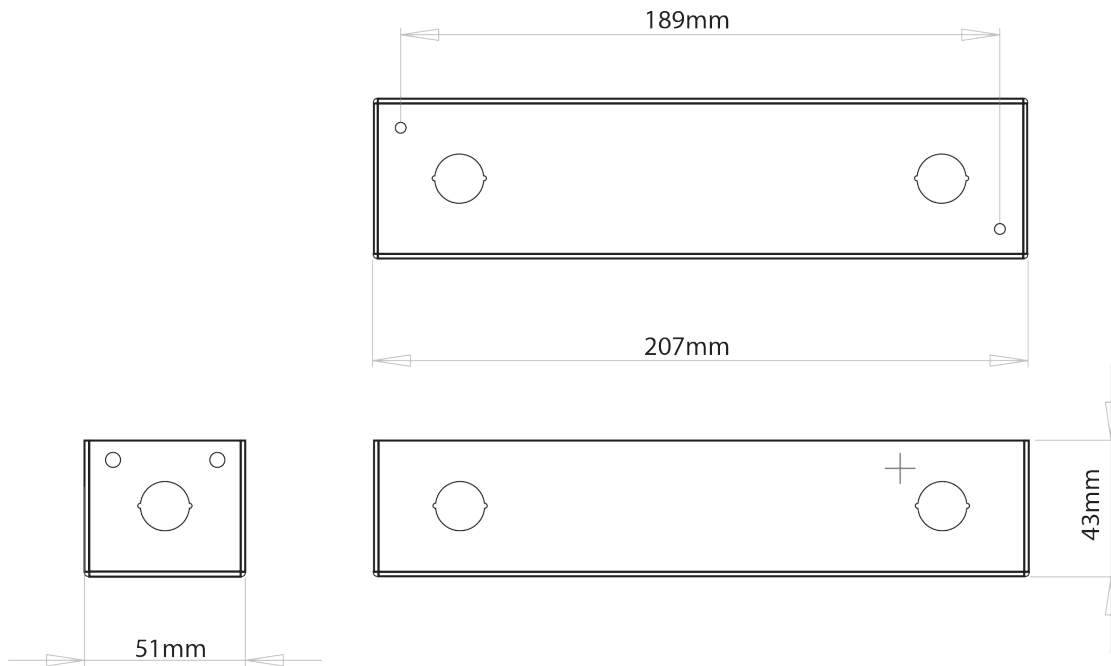

G4 - REMOTE OUTDOOR (REO)

