




RoHS

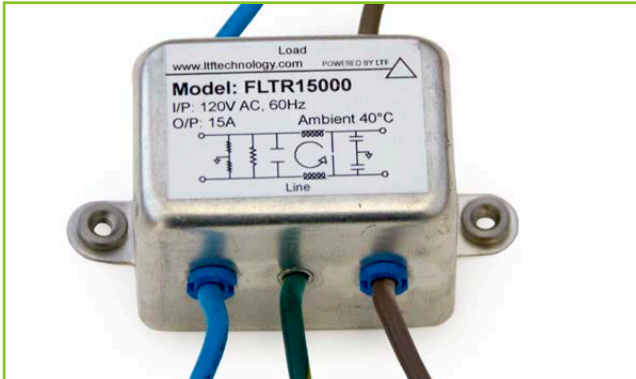


Ambient	40°C
Protection	Input / Output
Storage	-25°C / +85°C
Humidity	5~85% RH Max.

GENERAL SPECIFICATIONS

Rated Voltage (AC/DC)	V	120VAC 60Hz
Rated Current	A	15
Test Voltage (terminals to base plate, 1min AC)	V	2500 at 20 ± 15°C, 65 ± 20%
Isolation Resistance (terminals to base plate, 500VDC)	M Ω	100 Min. at 20 ± 15°C, 65 ± 20%
Operating Temperature	°C	-25 ~ +85
Operating Humidity	-	15 ~ 85% RH
Vibration	-	Frequency: 10 ~ 55Hz
		Amplitude: 1.5mm Sweep for 1 min.
		Dimension and times: X, Y, and Z directions for 2 hours each

WIRING DIAGRAM

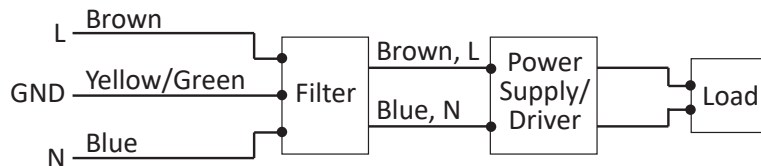

MECHANICAL SPECIFICATIONS

