




L.T.F.

Dimmable LED Driver

10W DA10W-3001 Series 120V AC Constant Current & Constant Voltage

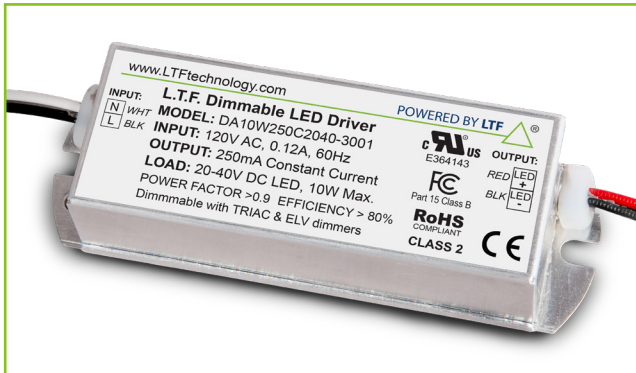

Efficiency	> 80%
Power Factor	> 0.90
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 64
Class	Class 2 Power Supply
Dimming	ELV, Triac



RoHS



FCC Part 15
Class B Compliant



* Ask for more
information

FEATURES

- Fully dimmable with ELV & Triac dimmers
- Flicker free dimming
- Title 24 compliant
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Aluminum casing for optimal heat dissipation
- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Class 2 power supply
- Efficient, High power factor > 0.90

CONSTANT CURRENT OPTIONS

Model #	Input	Wattage	Voltage Range	Output Current	Form Factor
DA10W100C7999-3001	120V AC 0.12A 60Hz	10W	79V - 99V DC	100mA	T11 BF, BF1
DA10W150C4767-3001			47V - 67V DC	150mA	
DA10W200C3050-3001			30V - 50V DC	200mA	
DA10W250C2040-3001			20V - 40V DC	250mA	
DA10W300C1333-3001			13V - 33V DC	300mA	
DA10W350C0929-3001			9V - 29V DC	350mA	
DA10W400C0525-3001			5V - 25V DC	400mA	
DA10W450C0222-3001			2V - 22V DC	450mA	

**UL Listed Models Include External Remote Mount Case



L.T.F.

Dimmable LED Driver

**10W DA10W-3001 Series 120V AC
Constant Current & Constant Voltage**


CONSTANT VOLTAGE OPTIONS

Model #	Input	Wattage	Output Voltage	Load	Form Factor
DA10W12V-3001	120V AC 0.12A, 60Hz	10W	12V DC	12V DC LED 0.83A Max.	T11
DA10W24V-3001			24V DC	24V DC LED 0.42A Max.	


MECHANICAL SPECS

Available Form Factors	Dimensions
"T11"	95 (77) x 31 x 21mm
"BF"	77 x 31 x 21mm
"BF1"	77 x 31 x 21mm

T11

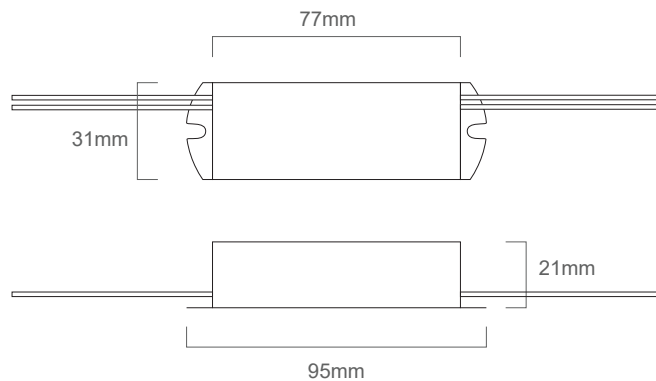


BF*

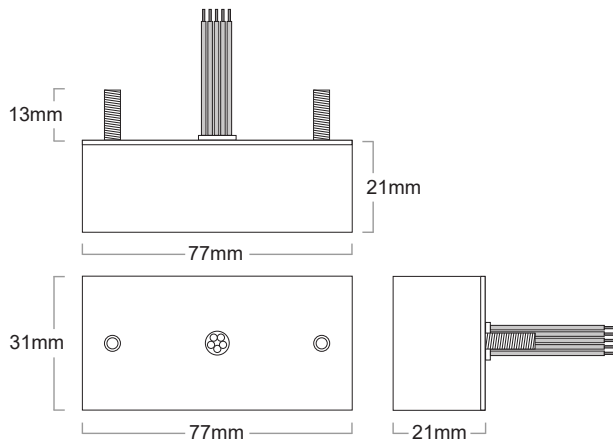

*BF case includes 13mm mounting studs

BF1**

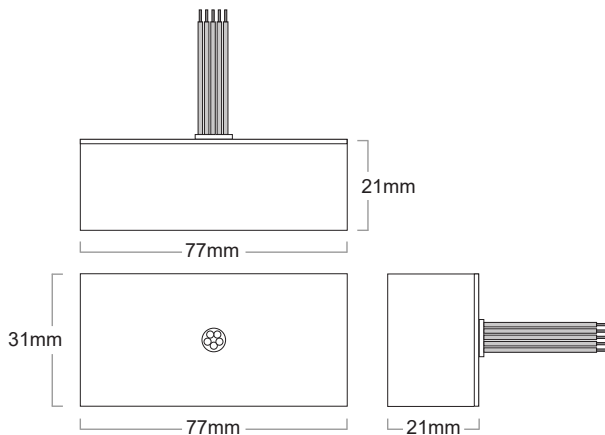

**BF1 case does not include mounting studs



L.T.F.

Dimmable LED Driver

**10W DA10W-3001 Series 120V AC
Constant Current & Constant Voltage**




REMOTE ENCLOSURES - UL LISTED

Model	Enclosure Type	Enclosure Dimensions
LDA10W-XXXX-RE-3001	G1 (Damp Rated)	207 x 51 x 43mm
LDA10W-XXXX-REO-3001	G4 (Wet Rated)	238 (202) x 66 x 48mm



G1 INDOOR REMOTE ENCLOSURE

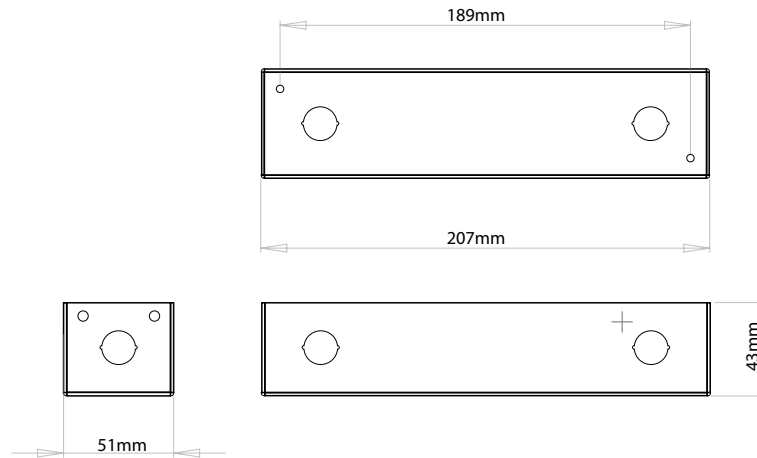

G4 OUTDOOR REMOTE ENCLOSURE

