




L.T.F.

Dimmable LED Driver

**30W DA30W700C2542-3001-1 120V Series
700mA Constant Current**

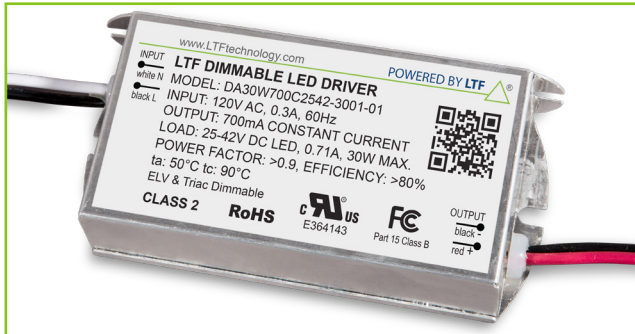

Efficiency	> 80%
Power Factor	> 0.90
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
Class	Class 2 Power Supply
Dimming	ELV, Triac



RoHS



FEATURES

- High performance LED driver
- Fully dimmable with ELV & Triac dimmers 0-100%
- Flicker free dimming
- Title 24 Compliant, AAA rating
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Class 2 power supply
- Efficient, High power factor > 0.90


ELECTRICAL SPECIFICATIONS

Model #	Input Voltage (Nominal)	Input Voltage (Min.-Max.)	Wattage	Output Current	Load
DA30W700C2542-3001-1	120V AC, 0.3A 60Hz	90V-132V AC, 60Hz	30W	700 mA	25V - 42V DC LED

MECHANICAL SPECS

Form Factor	Dimensions
"SM2"	95 (110) x 55 x 25mm

SM2

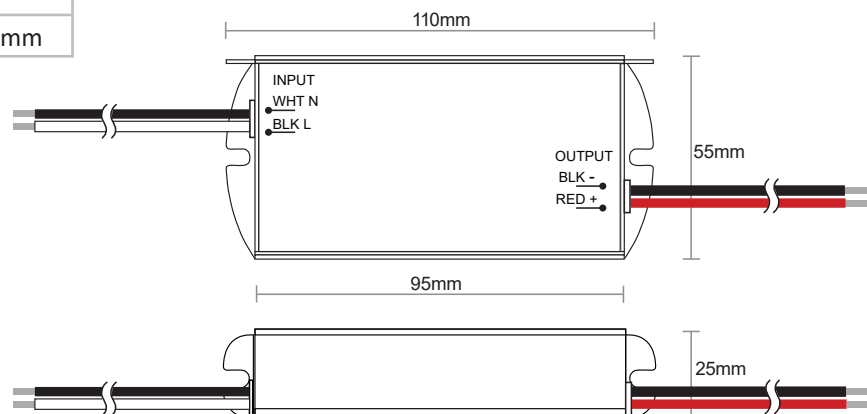

L.T.F. L.L.C. PHONE: (847) 498-5832 FAX: (773) 337-5628 EMAIL: LTFsales@ltftechnology.com

Company's Address: 11966 Oak Creek Pkwy. Unit H Huntley IL 60142 U.S.A. www.ltftechnology.com

© L.T.F., L.L.C. All rights reserved. L.T.F. reserves the right to change specification for product improvements without notification.