

## Single CCT 300 LED Series

### QLUXF5000300LED



<b>CRI</b>	Ra 97+
<b>R9 Value</b>	90+
<b>Lumens per foot</b>	228 lm/ft
<b>LED's per foot</b>	18 LEDs/ft
<b>Cut lengths</b>	3.937" (100mm)
<b>Watts per foot</b>	~4.4W/ft
<b>Input Voltage</b>	24V DC
<b>Luminous Efficiency</b>	66 lm/w
<b>Tape width</b>	0.39" (10 mm)



### FEATURES


- High CRI 97+ and High R9 90+
- Title 24 Compliant
- High efficacy lumen output - XX lm/W
- UL Listed
- LM80 2835 LED's
- Tight binning less than 3 MacAdam Elipses
- Uniform linear light output
- High efficiency LED tape
- 50,000 hour rating
- Ideal for use with LTF UniDriver Series, 24V constant voltage LED drivers



### ELECTRICAL SPECIFICATIONS


Model Number	Input Voltage	CCT	lm/m	W/m	lm/W
QLUXF5000300LED927	24V DC	2700K	720/m	11.4 W/m	63/W
QLUXF5000300LED930	24V DC	3000K	750/m	11.4 W/m	66/W

**SPECTRORADIOMETRIC PARAMETERS**

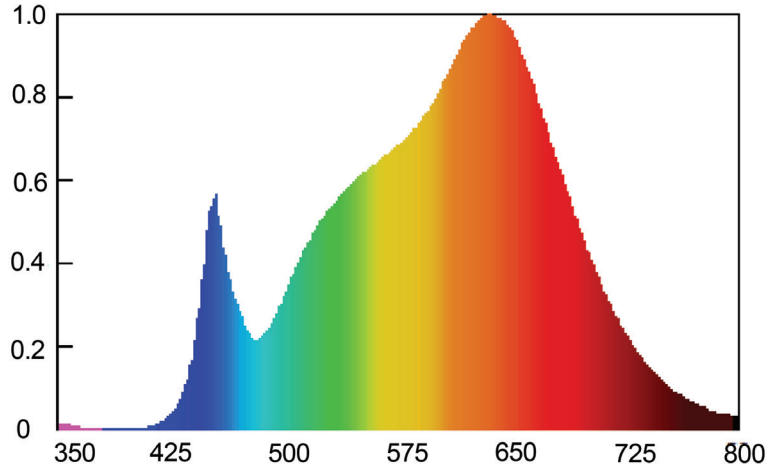

Spectral Distribution

**CRI CHART (3000K)**

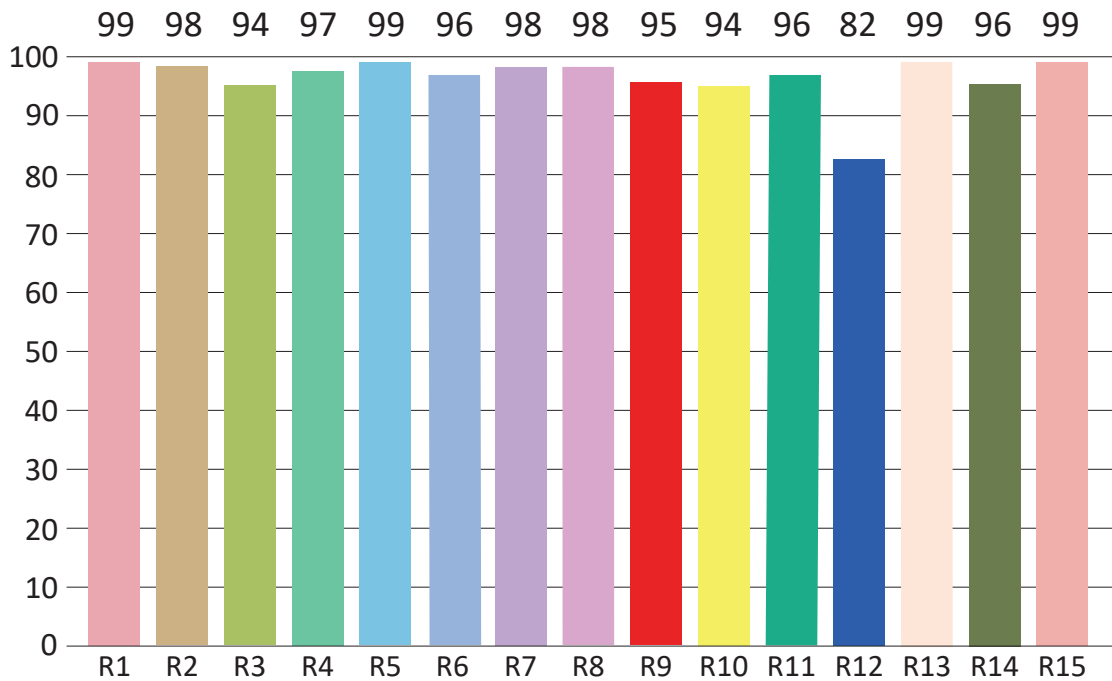

### MECHANICAL SPECIFICATIONS

