

**DS3W-0000 120V-277V**  
Constant Current

**UNIDRIVER**<sup>®</sup>



Efficiency	>78%
Power Factor	>0.90
Case TC	85°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 67
Class	Class 2 Power Supply
Dimming	ELV, TRIAC, 0-10V
Output Voltage or Constant Current	150mA




- Universal Input 120V-277V AC 50/60Hz
- True Tri Mode dimming at all input voltages
- Smooth, flicker free dimming 100% - 0.1%
- Title 24 Compliant, AAA rating
- Class 2 power supply
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/listed, meets UL8750, 1310

**FEATURES**

- requirements
- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Efficient, High power factor >0.90





**MODEL KEY**

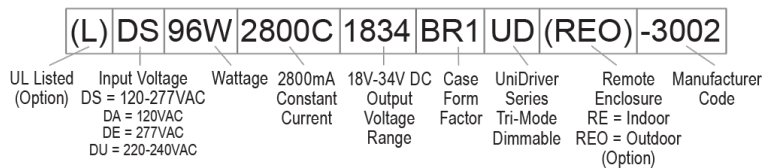

**MODEL SPECIFICATIONS**

Constant Current					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DS3W150C1520MB1UD-0000	120-277V AC, 0.04A, 50/60Hz	3W	15V - 20V DC LED	150mA	MB1

### DIMMING CURVES

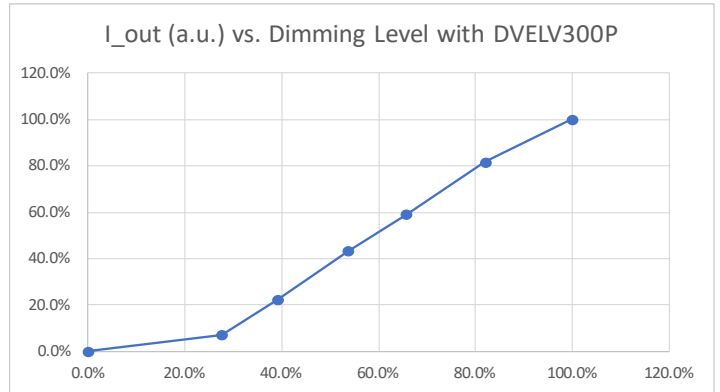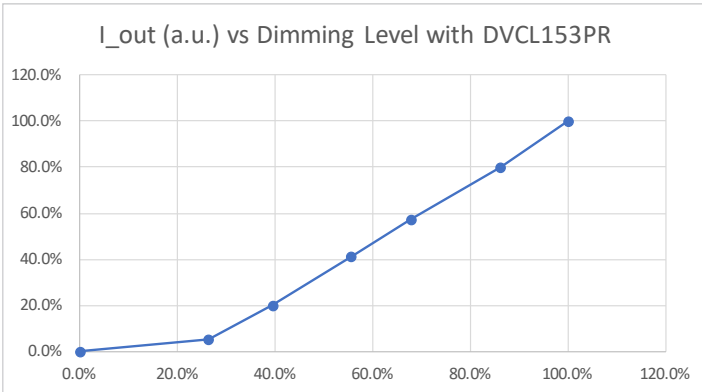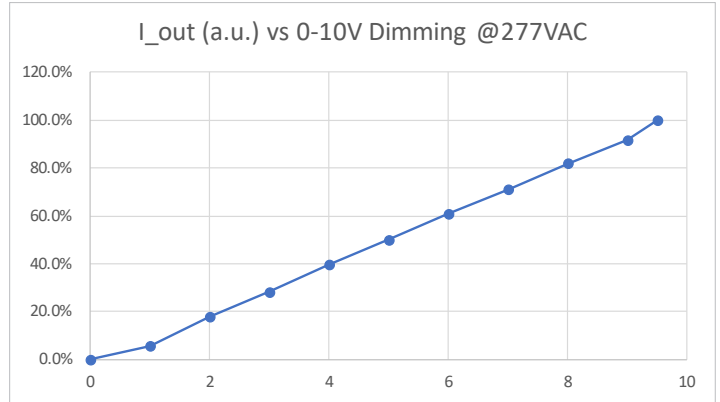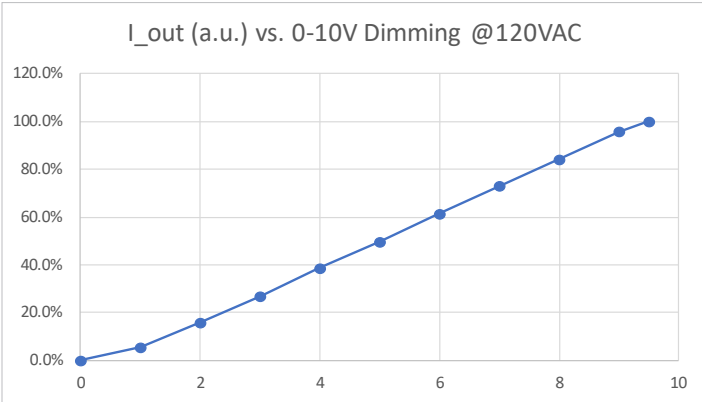

### MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
MB1	68(2.7") x 40(1.6") x 22mm(0.9")

