

LDS200W48VUDREO
Constant Voltage

UNIDRIVER



Efficiency	>87
Power Factor	>82%
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP67
Class	Class 2 Power Supply
Dimming	ELV, TRIAC, 0-10V
Output Voltage	48V




- Universal input 100 - 277V AC 50/60Hz
- True Tri Mode dimming at all input voltages: ELV, TRIAC, 0-10V
- Smooth dimming 100% - 0.1%
- Title 24 compliant, AAA rating
- Isolated output per NEC and UL safety requirements
- UL & EL recognized/listed, meets UL8750, 1310 requirements

FEATURES

- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Efficient, high power factor >0.85

MODEL KEY


Model Number Key - Constant Voltage

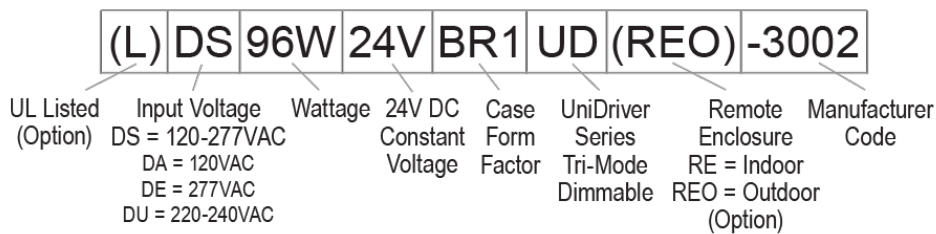

MODEL SPECIFICATIONS

Constant Voltage						
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Weight	Available Form Factor
LDS200W48VUDREO	100 - 277V AC 2.2A, 50/60 Hz	200W	48V DC	48V DC LED	5.5 lbs.	G8

DIMMING CURVES

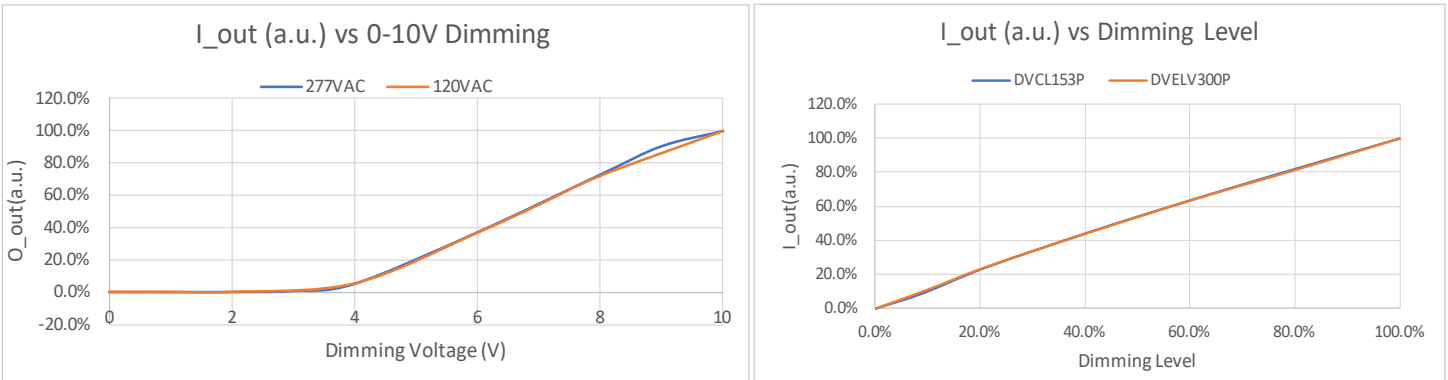

MECHANICAL SPECS

Form Factor	Dimensions
G8	12.7"(323.7mm) x 4.3"(108mm) x 1.8"(45.1mm)

