

QLUXF5000600LED92065

Architectural Grade Color Tuneable LED Tape



CRI / R9	95+/90+
Lumens per foot	235lm/ft
LEDs per foot	18 LEDs/ft
Cut Lengths	3.9" (100mm)
Watts per foot	3.0W/ft
Input Voltage	24V DC
Luminous Efficiency	78lm/W
Tape Width	0.4"(10mm)



RoHS



- High CRI >95 and high R9 >90, TLCI-2012 97
- Adjustable CCT tuning range from 2000K to 6500K
- Title 24 Compliant
- Maximum run length 5 meters
- LM80 LEDs
- Uniform, Linear light output
- IP rating available IP20, IP54, and IP64

FEATURES

- Tight binning less than 3 MacAdam Ellipses
- UL Listed
- 50,000 hour rating
- Ideal for use with LTF UniDriver series 24V constant voltage LED drivers

MODEL SPECIFICATIONS



Model Number	Input Voltage	Adjustable CCT	IP	Lm/m*	W/m*	lm/W*	Reel Length
QLUXF5000600LED92065LT	24V DC	2000K to 6500K	IP20	770lm/m	10W/m	78lm/W	5M

*Measurements based on 24V input voltage

QLUXF5000600LED92065

Architectural Grade Color Tuneable LED Tape



DIMMING CURVES

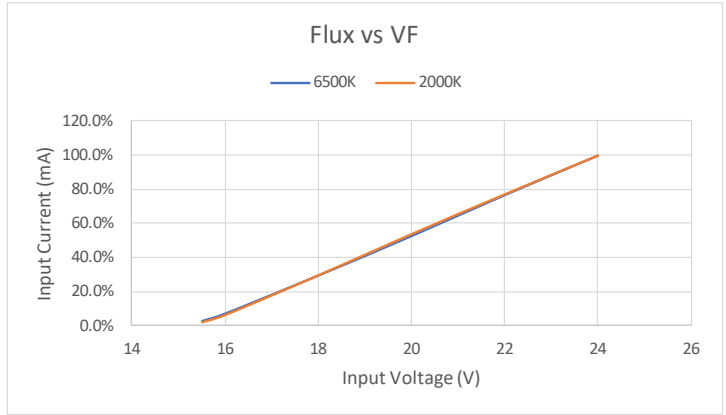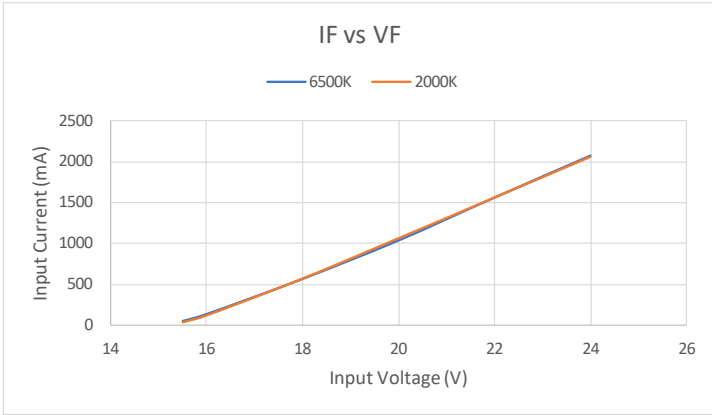

SPECTRORADIOMETRIC PARAMETERS

6500K

2000K

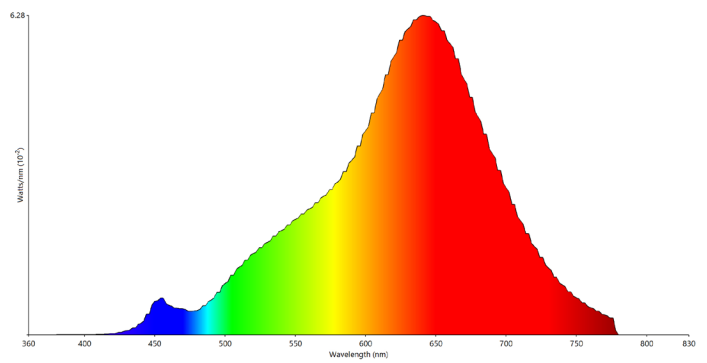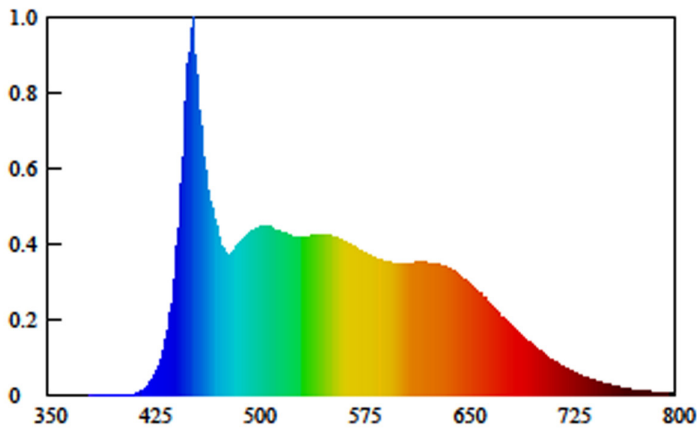



QLUXF5000600LED92065

Architectural Grade Color Tuneable LED Tape

CRI TEST

6500K



2000K

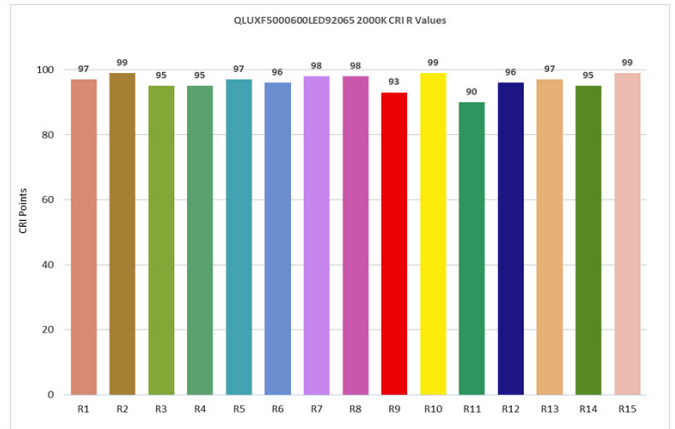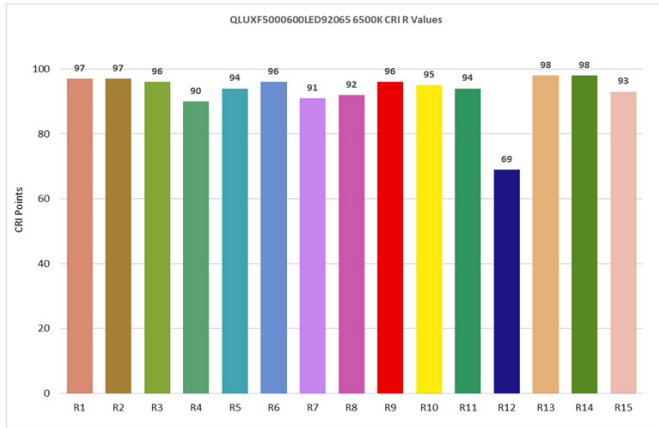

TM-30 CHART

6500K

2000K

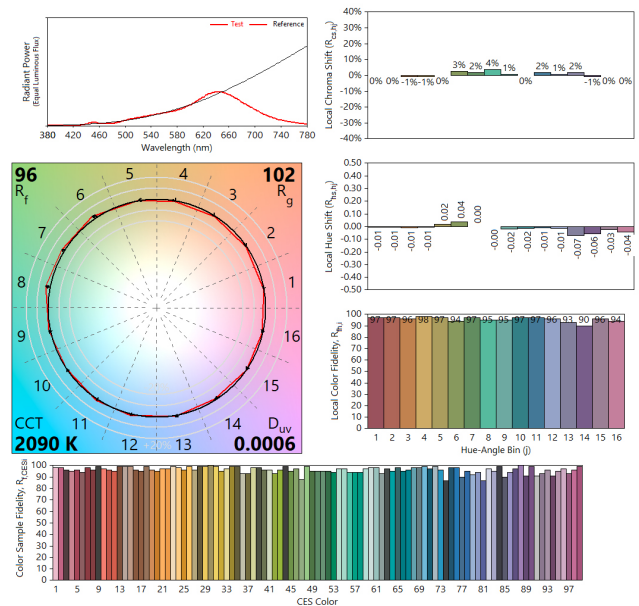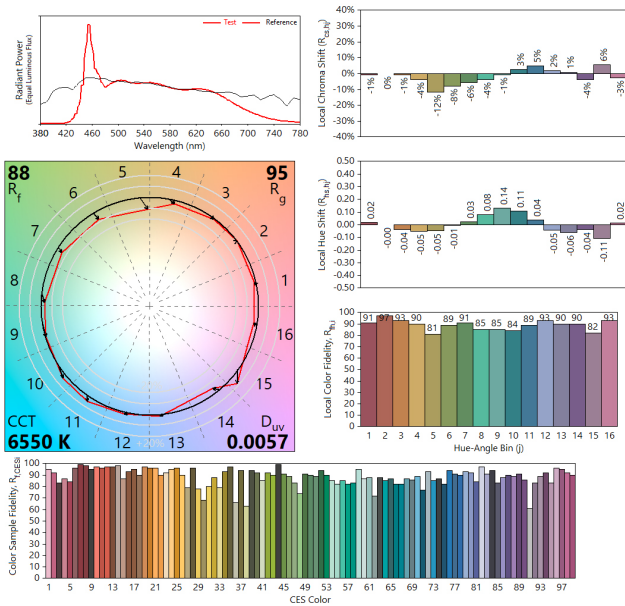

QLUXF5000600LED92065

Architectural Grade Color Tuneable LED Tape

MECHANICAL SPECS

