

QLUXL30516W32LED930
24V 304mm Linear DC LED Board



Wattage	16W
CRI	95+
Available CCT	3000K
Lumens	1800lm
Efficacy	110lm/W
Number of LEDs	32 LEDs
Beam Angle	120°
Dimensions	12”(304mm) x 1”(25.4mm) x 0.04”(0.93mm)
Dimming	Constant Current Reduction



FEATURES

- Superior Color Rendering CRI 95+
- High efficacy lumen output 110lm/W
- LM-80 compliant LEDs
- Tight Binning 3 Step Mac Adam Ellipses
- Uniform & crisp light source intensity
- Hot Spot Free Design
- Extra thin low profile
- Low heat generation, easy thermal management
- Easy to fit in new design or retrofit applications

APPLICATIONS

Ideal for new and retrofit architectural designs and lighting fixtures.

Indoor Lighting

- Ceiling Light
- Wall Sconces
- Table Lamps
- Fixtures
- Signage

Outdoor Lighting


- Street Light
- Marker Light
- Wall Sconces
- Signage Light




MODEL SPECIFICATIONS

Model Number	CCT	Watts	Typ. Forward Voltage	Max. Forward Voltage	Typ. Forward Current	Max. Forward Current
QLUXL30516W32LED930	3000K	16W	22.7V	23.5V	700mA	1000mA


SPECTRORADIOMETRIC CHARACTERISTICS

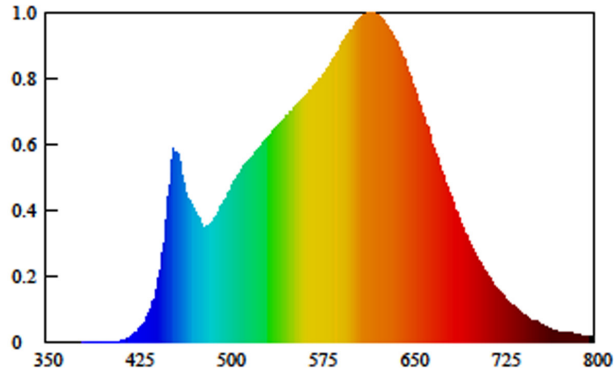



CRI TEST

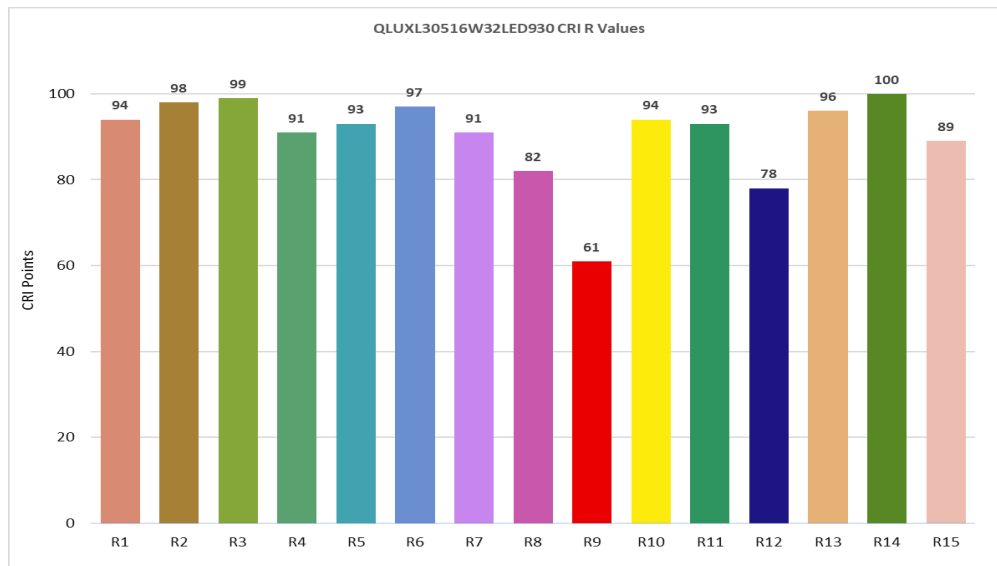

TM30 CHART

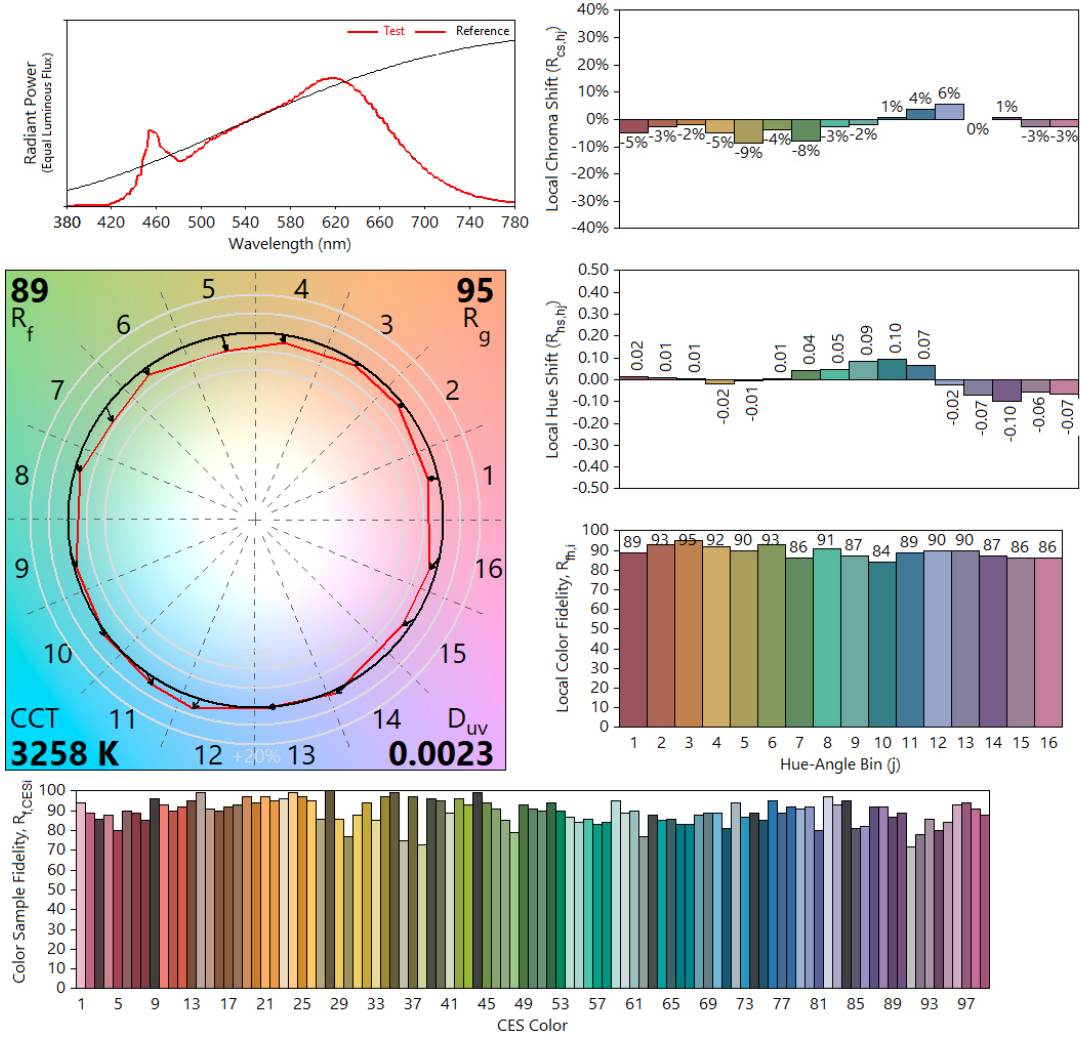

DIMMING CURVES

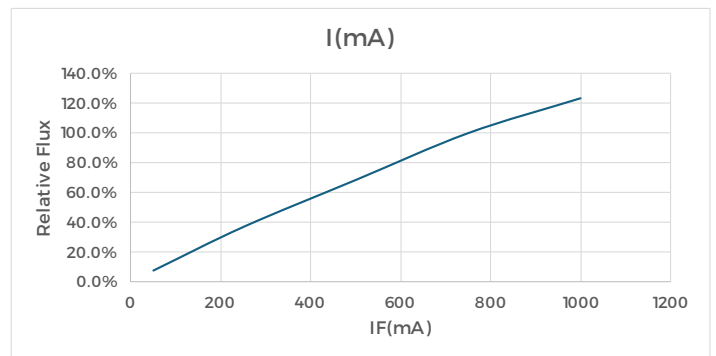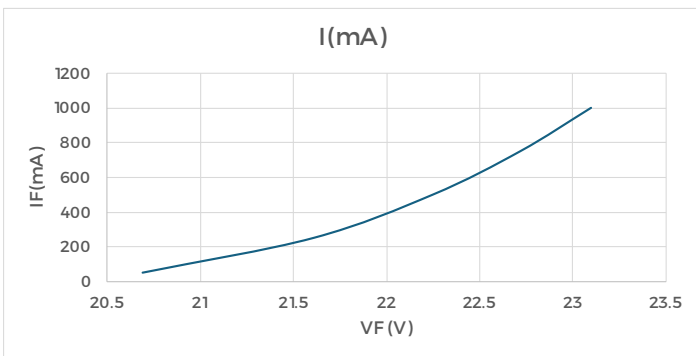

MECHANICAL SPECS

