

G5.3 GLOBE LED Bulb
Dim to Warm

MiniGlobe™



Input Voltage	12V AC
Wattage	3.7W
Nominal Lumens	270lm
CCT	3000K - 1800K
CRI/R9	96+, 80+
Color Fidelity (Rf), Gamut (Rg)	93, 102
Percent Flicker	<3%
Dimming	Phase Dimmable
Dimming Range	100% - <0.1%
Beam Angle	320°



RoHS



MiniGlobe™ is an ultra-compact 12V LED bulb designed for decorative and architectural lighting applications where a small, unique omni-directional LED bulb is essential. It is packed with features that ensure the perfect illumination!

FEATURES

- **Dim to Warm Technology:** 3000K - 1800K CCT
- **Omni-Directional Design:** 320° beam angle
- **Ultra-Compact Size:** 1.6" tall and 1.2" wide
- **High Output Efficiency:** Operating at 3.7W it delivers 270lm
- **Fully Dimmable:** Works seamlessly with standard dimmers.
- **Exceptional Color Accuracy:** CRI 96+, R9 80+ and TM30 100
- **No Visible Flicker:** Exceeds Title 24, JA8, IEEE requirements

APPLICATIONS

- **Decorative Lighting:** Glass pendants, wall sconces and chandeliers.
- **Hospitality & Hotels:** Set the perfect mood with warm, inviting lighting.
- **Residential Lighting:** Enhance chandeliers, sconces, and decorative fixtures with soft, adjustable illumination.
- **Architectural & Accent Lighting:** Elevate interior designs with high-quality, energy-efficient LED lighting.
- **Patented Technology:** Engineered for superior performance in modern lighting applications.

MODEL SPECIFICATIONS

Model Number	Lens Shape	Watts	Input Voltage	CCT	Lumens	Beam Angle	Finishes
G5.34W12V3018KWD120W-1	Globe	3.7W	12V AC	3000K dims to 1800K	270lm	320°	White

Custom Finishes & CCT Available


G5.3 GLOBE LED Bulb
Dim to Warm

RECOMMENDED POWER SUPPLIES


Model Number	Wattage	Input	Output	IP Rating	FCC Compliant	Dimming
TA60WA12LED	60W	120V AC, 0.5A 50/60Hz	12V AC	IP60	No	ELV, Optional 0.10V
TA60WA12LED65B15				IP65	Yes	
TE60WA12LED65B15		277V AC, 0.2A 50/60Hz	12V AC	IP65	Yes	

SPECTRORADIOMETRIC CHART

3000K

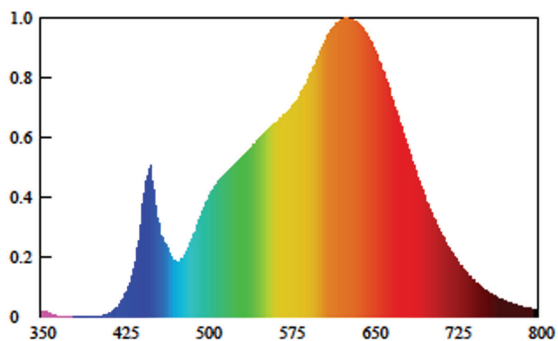


1800K

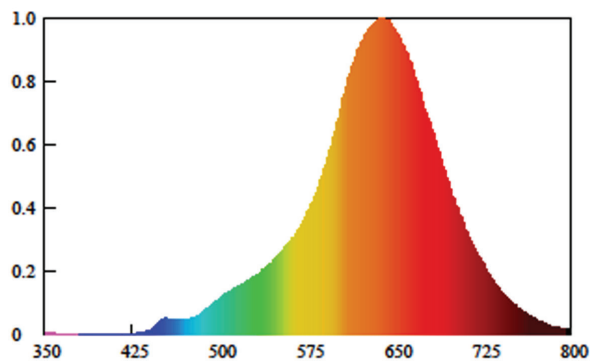


CRI TEST

3000K

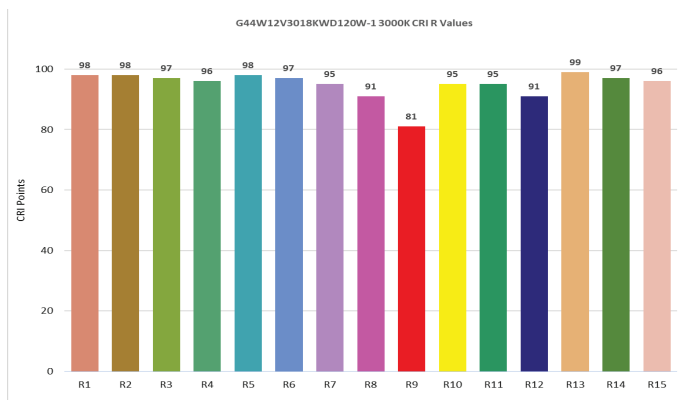


1800K

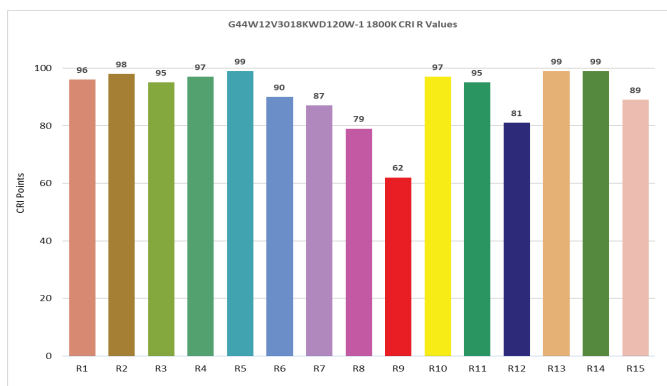


G5.3 GLOBE LED Bulb
Dim to Warm

TM30 TEST



3000K

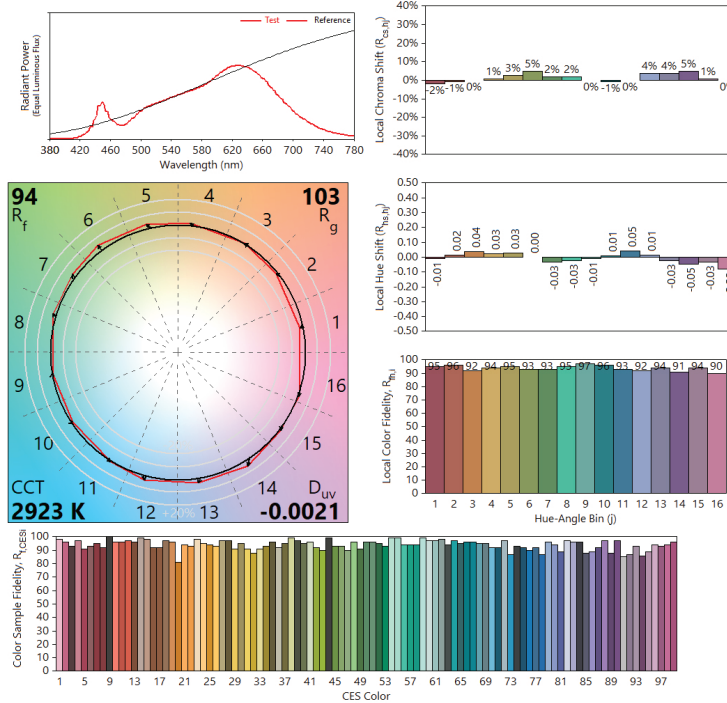

1800K

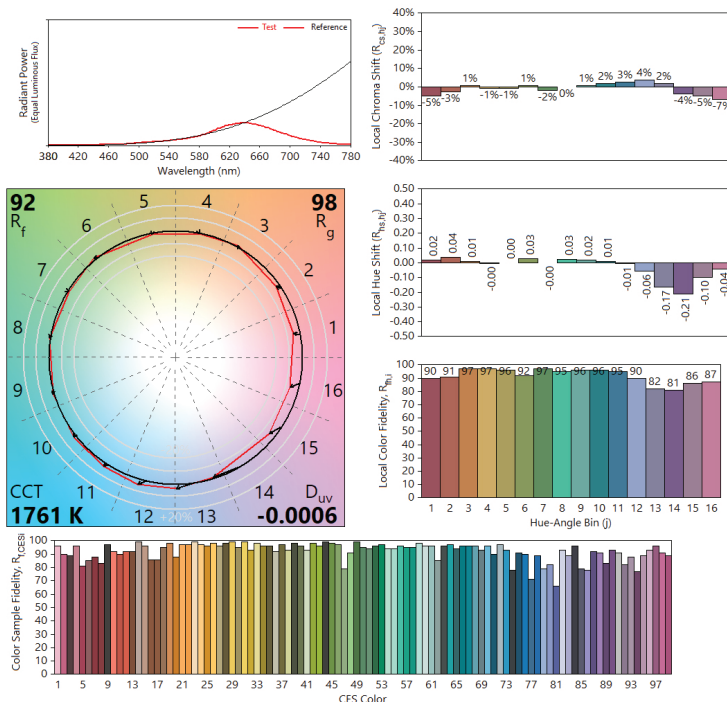


DIMMING CURVE

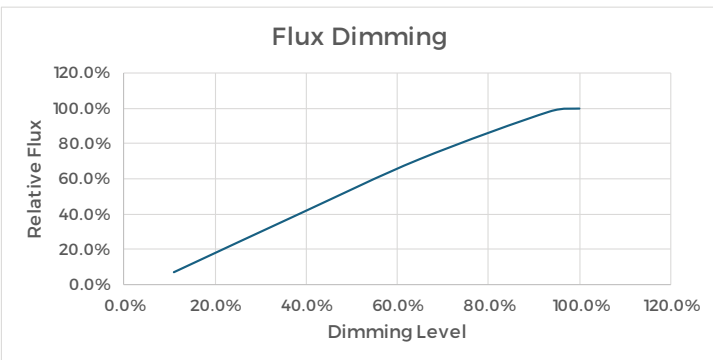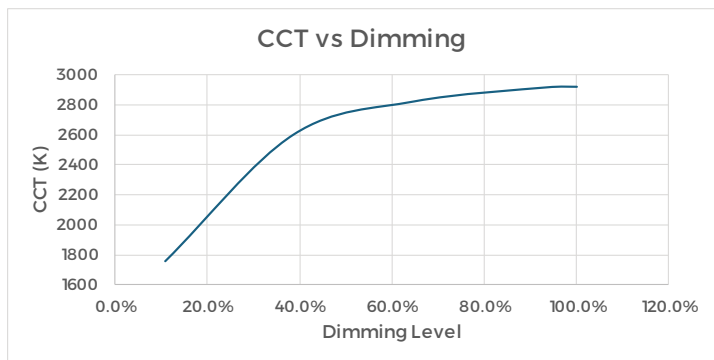


MECHANICAL SPECIFICATIONS

G5.3 (Globe)

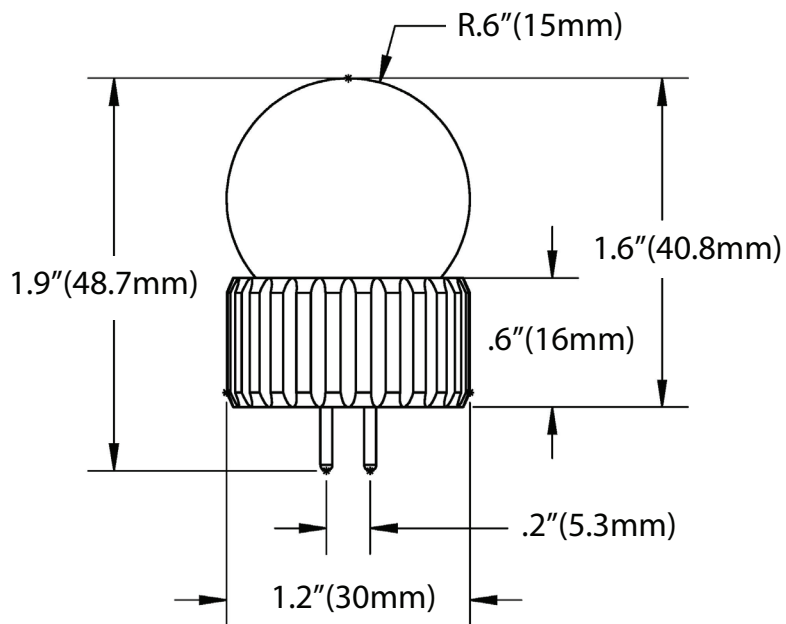

G5.3 GLOBE LED Bulb
Dim to Warm



Dim to Warm

High Color Accuracy

270 Lumen

Low Profile

Patented Technology






320° Beam Angle


Title 24/JA8

G5.3/G4 base

Designed in USA

SunLight2[®]
INSPIRED BY NATURE

  **RoHS**   


Designed in the U.S.A.

www.SunLight2.com