


DS3W700C0305MB1UD
Constant Current

UNIDRIVER



Efficiency	>78%
Power Factor	>0.9
Case TC	85°C
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 67
Class	Class 2 Power Supply
Dimming	Triac, ELV, 0-10V
Output Voltage	03V - 20V

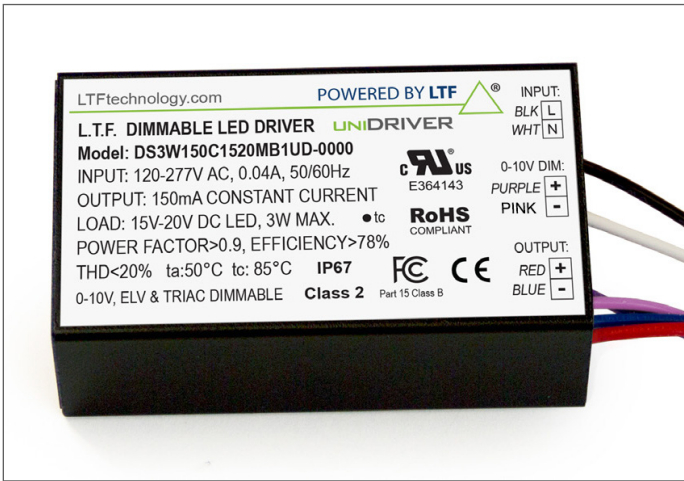

- Universal Input 120V-277V AC 50/60Hz
- True Tri Mode Dimming at all input voltages Triac, ELV & 0-10V
- Smooth, flicker free dimming 100%~0.1%
- Title 24 Compliant, AAA rating
- Class 2 power supply
- Isolated output power per NEC and UL safety requirements






FEATURES

- UL & ETL recognized/listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Efficient, High power factor >0.90

ELECTRICAL SPECIFICATIONS

Constant Current				
Model Number	Input Voltage	Output Voltage	Output Current	Available Form Factor
DS3W150C1520MB1UD-0000	120 - 277V AC, 0.04A 50/60Hz	15V - 20V	150mA	MB1

ELECTRICAL CHARACTERISTICS

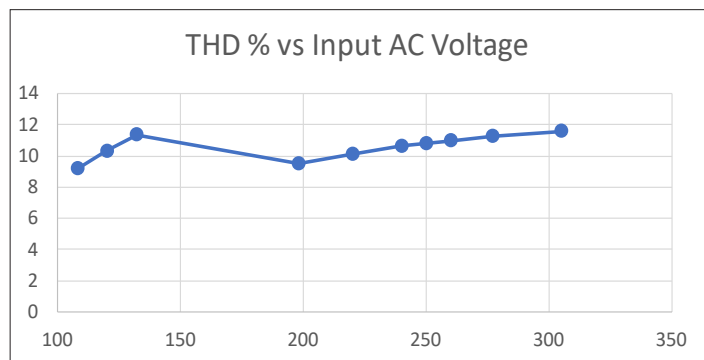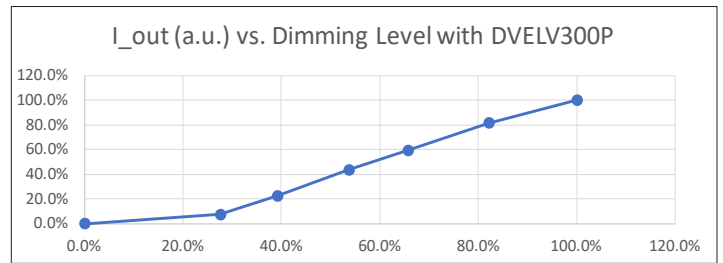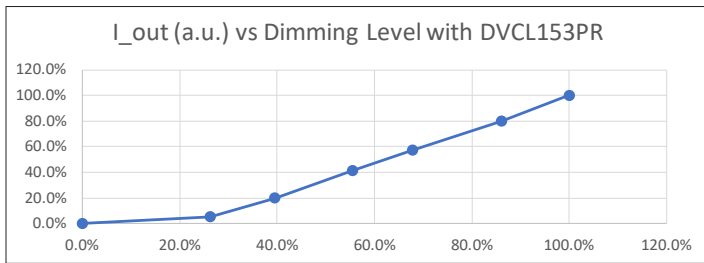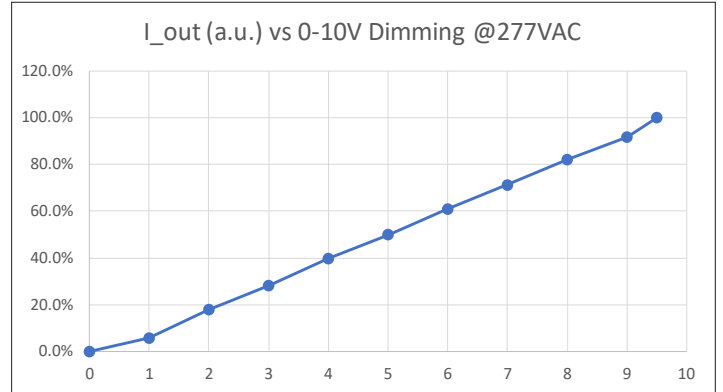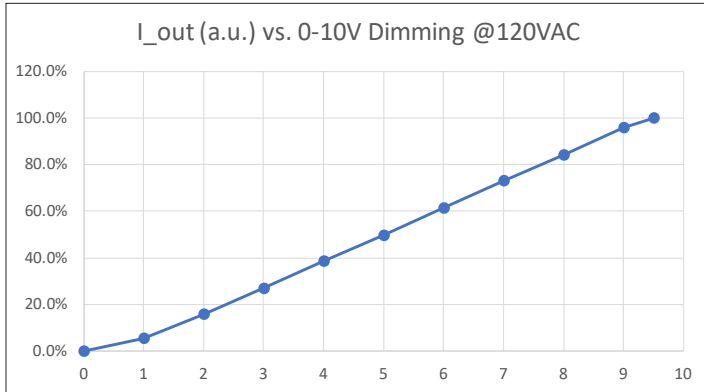

MECHANICAL CHARACTERISTICS

FORM FACTOR	DIMENSIONS
MB1	2.7"(68mm) x 1.6"(40mm) x 0.9"(22mm)

MB1

