

TA150WD24LEDB15

No-Load Electronic Transformer



Efficiency	>85%
Power Factor	>95%
Case TC	90°C Max.
Protection	Input/Output
Storage	-30°C/+90°C
Dimming	ELV Dimming



RoHS



FEATURES

- No Load technology, works with both Halogen & LED AC loads **
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed, meets UL 2108 requirements
- Auto-reset; Short circuit, overload and thermal protection
- Soft start
- Dimmable
- Low profile, small compact design to fit in most enclosures


ELECTRICAL SPECIFICATIONS

Model Number	Input Voltage	Output Voltage	Load Type	Dimming	Form Factor
TA150WD24LEDB15	120V AC, 1.25A 50/60Hz	24V DC	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	ELV	E7
TA150WD24LEDB15-0001	120V AC, 1.25A 50/60Hz	24V DC	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	ELV	E8


MECHANICAL SPECIFICATIONS

FORM FACTOR	DIMENSIONS
E7	4.2"(106.1mm) x 2.2"(56.8mm) x 1.3"(32.6mm)
E8	4.9"(123mm) x 2.2"(56.8mm) x 1.3"(32.6mm)

E7

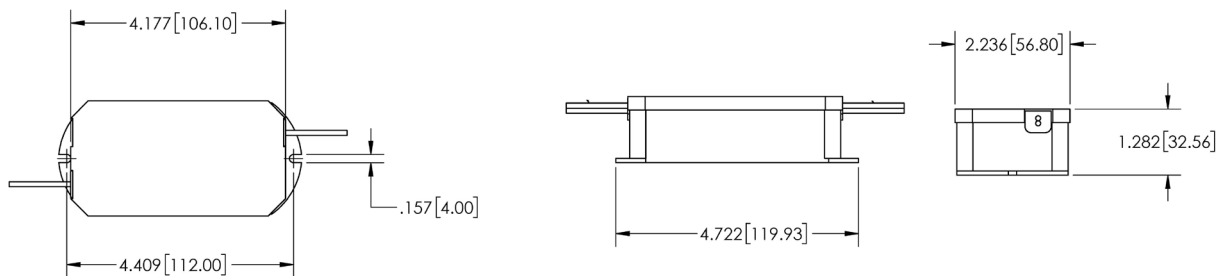

E8

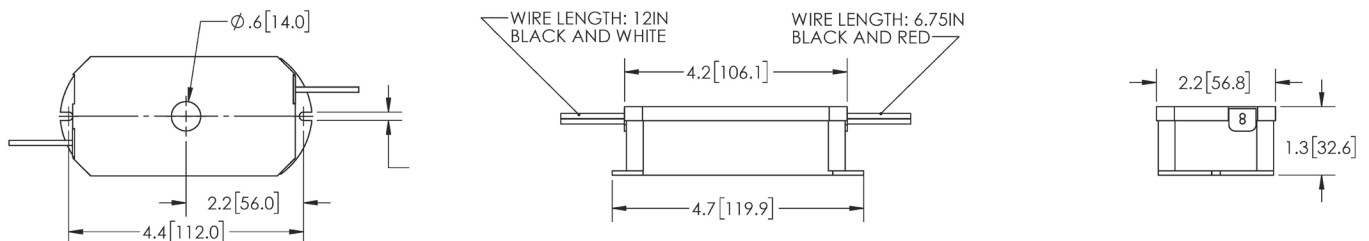

REMOTE ENCLOSURES

TA150WD25LEDB15RE

G2 (Damp Rated)

9"(233mm) x 3.4"(85.5mm) x 2"(49mm)

