



L.T.F Low Voltage Electronic Power Supply



200W 12V AC/DC TA200WA12, TU200WA12 Series & TA200WD12, TU200WD12 Series



Efficiency	higher than 85%
Power Factor	>98%
Case TC*	90C° Max
Protection	Input/ Output
Storage	-30°C/ +90°C
Humidity	95% RH max
IP Rating	IP 60
Dimming	ELV Dimmable



Year Warranty

FEATURES

- No load technology, works with both Halogen & LED AC loads **
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable
- Low profile, small compact design to fit in most enclosures

ELECTRICAL SPECIFICATIONS

120V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TA200WA12	120V AC 50/60Hz	1.67 A	12V AC	300g	Incandescent & Halogen Bulbs
TA200WDS12	120V AC 50/60Hz	1.67 A	12V DC	300g	Incandescent & Halogen Bulbs
TA200WDS12LED	120V AC 50/60Hz	1.67 A	12V DC	300g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

120V Remote					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TA200WDS12RE	120V AC 50/60Hz	1.67 A	12V DC	773g	Incandescent & Halogen Bulbs
TA200WDS12REO	120V AC 50/60Hz	1.67 A	12V DC	1097g	Incandescent & Halogen Bulbs
TA200WDS12LEDRE	120V AC 50/60Hz	1.67 A	12V DC	773g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs
TA200WDS12LEDREO	120V AC 50/60Hz	1.67 A	12V DC	1097g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

* Under confirmed thermal condition




220-240V					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TU200WA12	220-240V AC 50/60Hz	0.91 A	12V AC	300g	Incandescent & Halogen Bulbs
TU200WDS12	220-240V AC 50/60Hz	0.91 A	12V DC	300g	Incandescent & Halogen Bulbs
TU200WDS12LED	220-240V AC 50/60Hz	0.91 A	12V DC	300g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

220-240V Remote					
Model #	Input Voltage	Input Current	Output Voltage	Weight	Load Type
TU200WA12RE	220-240V AC 50/60Hz	0.91 A	12V AC	773g	Incandescent & Halogen Bulbs
TU200WA12REO	220-240V AC 50/60Hz	0.91 A	12V AC	1097g	Incandescent & Halogen Bulbs
TU200WDS12RE	220-240V AC 50/60Hz	0.91 A	12V DC	773g	Incandescent & Halogen Bulbs
TU200WDS12REO	220-240V AC 50/60Hz	0.91 A	12V DC	1097g	Incandescent & Halogen Bulbs
TU200WDS12LEDRE	220-240V AC 50/60Hz	0.91 A	12V DC	773g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs
TU200WDS12LEDREO	220-240V AC 50/60Hz	0.91 A	12V DC	1097g	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs


MECHANICAL SPECS. FOR ALL AC PRODUCTS

Available Form Factors	Dimensions
Standard "E2"	104.1X81.3X39.4mm
"G2"	233.1X85.5X48.9mm
"G3"	280x103x56mm


E2 - STANDARD

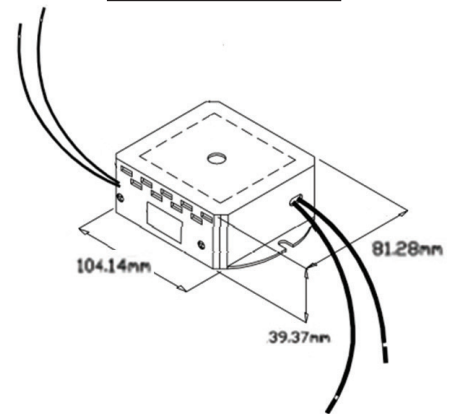

G2 - REMOTE(RE) MODELS ONLY

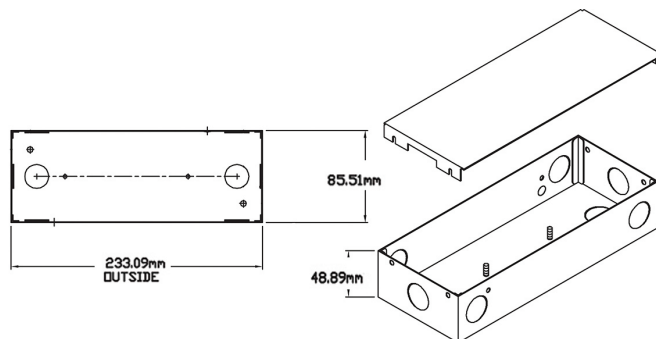

G3 - LED REMOTE (REO) MODELS ONLY

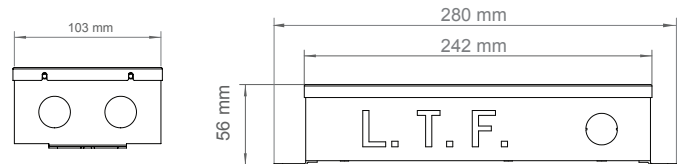





MECHANICAL SPECS. FOR ALL DC PRODUCTS

Available Form Factors	Dimensions
Standard "E4"	121X83X43.5mm
"E3"	104.1X81.3X39.4mm
"G2"	233.1X85.5X48.9mm


E4 - STANDARD

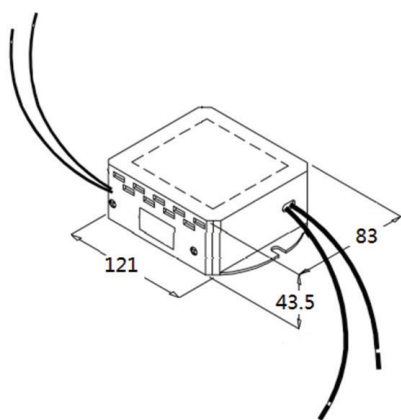

E3 - DS MODELS ONLY

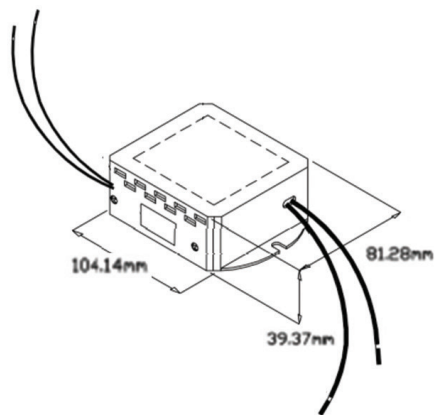

G2 - REMOTE(RE) MODELS ONLY

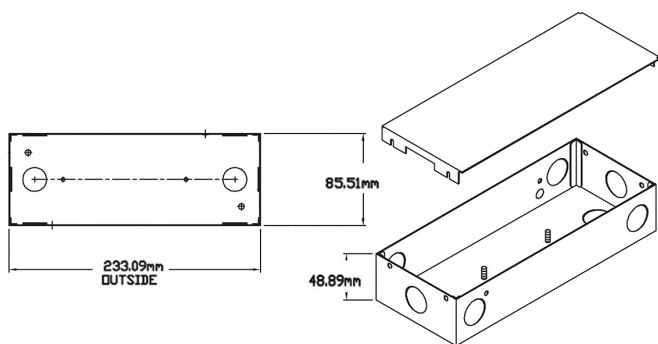

G3 - LED REMOTE (REO) MODELS ONLY

